

704 SE 7 ST.

704 SE 7 St,
Fort Lauderdale, FL 33316

DRAWING INDEX

SD0.0	COVER PAGE & GENERAL NOTES	SD2.5	STAIR SECTION 2ND FLIGHT
SD1.0	SCOPE OF WORK:1ST FLOOR	SD2.6	STAIR ELEVATION
SD1.1	SCOPE OF WORK:2ND FLOOR	SD3.0	CONNECTIONS DETAILS
SD2.0	STEEL STAIR FRAME PLAN VIEW	SD3.1	CONNECTIONS DETAILS
SD2.1	STEEL STAIR PLAN VIEW	SD3.2	STAIR SECTIONS
SD2.2	STAIR FRAME ELEVATION 1ST FLIGHT	SD3.3	CONNECTIONS DETAILS
SD2.3	STAIR ELEVATION 1ST FLIGHT	SD3.4	RAILING PLAN VIEW, ELEVATION & SECTION
SD2.4	STAIR FRAME SECTION 2ND FLIGHT		

GENERAL NOTES:

- THIS DESIGN COMPLIES WITH THE REQUIREMENTS OF THE FLORIDA BUILDING CODE 2020 (7th ED) & OTHER REFERENCES CODES & SPECIFICATION. ALL REFERENCED CODES AND SPECIFICATIONS SHALL BE LISTED ON THE FBC–2020 (7th ED) AT TIME OF PERMIT. ANY DISCREPANCIES BETWEEN THESE DRAWINGS AND APPLICABLE CODES SHALL BE IMMEDIATELY BROUGHT TO THE ATTENTION OF THE ENGINEER.
- UNLESS NOTED OTHERWISE (U.N.O) ON DRAWINGS OR THE SPECIFICATIONS, THESE NOTES SHALL APPLY TO THIS PROJECT.
- IF ANY ERRORS OR MISSIONS APPEAR ON THE DRAWINGS, SPECIFICATIONS OR OTHER DOCUMENTS, THE CONTRACTOR SHALL NOTIFY THE ENGINEER IN WRITING OF SUCH OMISSIONS OR ERRORS PRIOR TO PROCEEDING WITH ANY WORK WHICH APPEARS IN QUESTION. IN THE EVENT OF THE CONTRACTOR’S FAILURE TO GIVE SUCH NOTICE, HE SHALL BE HELD RESPONSIBLE FOR THE RESULTS OF ANY SUCH ERRORS OR OMISSIONS AND THE COST OF RECTIFYING THE SAME.
- THIS WORK REQUIRES A BUILDING PERMIT. CONTRACTOR TO OBTAIN THE APPROPRIATE BUILDING PERMITS PRIOR TO COMMENCEMENT OF WORK. CONTRACTOR IS TO FURNISH ALL LABOR, MATERIALS, SERVICES AND EQUIPMENT NECESSARY TO COMPLETE ALL WORK SHOWN ON THE DRAWINGS AND SPECIFIED HEREIN. CONTRACTOR IS SOLELY RESPONSIBLE FOR MEANS AND METHODS CONSTRUCTION, AND FOR THE SEQUENCES AND PROCEDURES TO BE USED.
- LOCATION AND SIZES OF EXISTING UTILITIES SHOWN ON THESE DRAWINGS ARE APPROXIMATE. ADDITIONAL UTILITIES MAY EXIST WHICH ARE NOT SHOWN ON THESE DRAWINGS. CONTRACTOR SHALL VERIFY ALL UTILITIES IN COORDINATION WITH ALL UTILITY COMPANIES PRIOR TO THE BEGINNING OF ANY CONSTRUCTION OPERATION. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO REPAIR OR REPLACE ALL DAMAGES.
- THE CONTRACTOR IS ADVISED THAT PROPERTIES ADJACENT TO THE PROJECT HAVE ELECTRIC, TELEPHONE, GAS, WATER AND/OR SEWER SERVICE LATERALS WHICH MAY NOT BE SHOWN ON PLANS. THE CONTRACTOR MUST REQUEST THE LOCATION OF THESE LATERAL SERVICES FROM THE UTILITY COMPANIES. THE ADDITIONAL COST OF EXCAVATING, INSTALLING, BACKFILLING AND COMPACTING AROUND THESE SERVICES IS CONTRACTOR RESPONSIBILITY.
- THE CONTRACTOR SHALL MAINTAIN ACCESS TO ALL ADJACENT PROPERTIES AT ALL TIMES.
- THE CONTRACTOR SHALL MAKE REQUIRED ARRANGEMENTS, SECURE AND PAY FOR ALL BARRICADES, ENCLOSURES, AND FENCING AS NEEDED FOR AND DURING THE PROGRESS TO PROTECT ADJACENT PROPERTIES. UNDER NO CIRCUMSTANCES SHALL THE CONTRACTOR LEAVE EXCAVATED TRENCHES, OR PARTS EXPOSED OR OPEN AT THE END OF THE WORKING DAY WHEN THE CONTRACTOR IS NOT WORKING, UNLESS ANY TRENCH IS COVERED, FIRMLY SECURED AND MARKED ACCORDINGLY FOR PEDESTRIAN TRAFFIC.
- EXISTING GRADES WERE TAKEN FROM THE BEST AVAILABLE DATA AND MAY NOT ACCURATELY REFLECT PRESENT CONDITIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR FAMILIARIZING WITH CURRENT SITE CONDITIONS, AND SHALL REPORT ANY DISCREPANCIES TO THE ENGINEER PRIOR TO STARTING WORK.
- CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND EXISTING CONDITIONS AT THE JOB SITE. ANY DISCREPANCIES BETWEEN PLANS, SECTIONS AND DETAILS OR THE APPLICABLE CODES OR REGULATIONS SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT OR ENGINEER DURING BIDDING OR BEFORE WORK BEGINS IN ORDER TO CLARIFY THE REQUIREMENTS AND TO EFFECT THE NECESSARY MODIFICATIONS, CHANGES AND/OR INSTRUCTIONS.
- CONTRACTOR SHALL BE RESPONSIBLE FOR RESETTING ALL DISTURBED CONDITIONS AND PROPER DISPOSAL OF ANY MATERIAL & GARBAGE FROM THE SITE AFTER COMPLETION OF WORK. CONTRACTOR SHALL COMPLY WITH THE REQUIREMENTS OF THE EPA AND THE NATIONAL POLLUTION DISCHARGE ELIMINATION SYSTEM (NPDES)
- DRAWINGS AND DIMENSIONS ARE BASED UPON DRAWINGS SUPPLIED BY THE CLIENT. THE ENGINEER WILL NOT BE RESPONSIBLE FOR ERRORS OR MISINTERPRETATIONS OF THE SYSTEM DESIGNED BY THE ENGINEER BASED ON CLIENT CONFIRMED DESIGN AND DIMENSIONS. ADDITIONAL DRAFTING TIME EMPLOYED IN THE CHANGE OF THE DESIGN AFTER SIGNING AND SEALING OF DRAWINGS WILL RESULT IN ADDITIONAL COST.
- DO NOT SUBSTITUTE MATERIALS, EQUIPMENTS OR METHODS OF CONSTRUCTION UNLESS SUCH SUBSTITUTIONS OR CHANGES HAVE BEEN APPROVED IN WRITING BY THE OWNER.
- THE ENGINEER HAS GENERATED THESE SHOP DRAWINGS BASED ON A PROVIDED DESIGN THAT HAS BEEN DEVELOPED BY A LICENSED ARCHITECT OR A COMPETENT LICENSED DESIGN PROFESSIONAL WHO CONFIRMED COMPLIANCE WITH ALL APPLICABLE NATIONAL AND FLORIDA BUILDING CODES.

- CONCRETE DESIGN AND REINFORCEMENT IN ACCORDANCE WITH ”STANDARD SPECIFICATIONS FOR STRUCTURAL CONCRETE” (ACI 318) AND WITH ” DETAILS AND DETAILING OF CONCRETE REINFORCEMENT” (ACI 315). ALL CONCRETE SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 3000 PSI AT 28 DAYS.
- ANCHORING CEMENT WITH A COMPRESSION STRENGTH OF 10 KSI AT THE END OF 7 DAYS.
- WHEN DISSIMILAR MATERIAL CONNECTIONS ARE MADE, SUCH AS CONCRETE TO METAL, THE DISSIMILAR MATERIAL SHALL BE SEPARATED BY COATING THE CONTACT SURFACE WITH BITUMASTIC MATERIAL.
- DO NOT SCALE DRAWINGS, DIMENSIONS ALWAYS GOVERN.
- DETAILS LABELED ”TYPICAL (TYP.)” SHALL APPLY TO ALL SITUATIONS THAT ARE SAME OR SIMILAR TO THOSE SPECIFICALLY DETAILED. TYPICAL DETAILS SHALL APPLY WETHER OR NOT THEY ARE SPECIFICALLY KEYED AT EACH LOCATION. THE ENGINEER SHALL HAVE FINAL AUTHORITY TO DETERMINE APPLICABILITY OF TYPICAL DETAILS.
- THE QUANTITIES AND DIMENSION SHOWN ON DRAWINGS ARE BASED ON THE ARCHITECTURAL DRAWINGS. ALL DIMENSION TO BE SITE VERIFIED BY GENERAL CONTRACTOR/ SUBCONTRACTOR.
- ELEMENTS WILL BE AS DESIGNED BY THE ENGINEER AND AS APPROVED BY ARCHITECT AND/OR OWNERS, TO CONFORM GENERALLY WITH THE ARCHITECTURAL DRAWING AND SPECIFICATIONS.
- FLORIDA BUILDING CODE, 2020 (7th ED) EDITION LOADS:
RAILING:
P= CONCENTRATED LOAD OF 200 lbs (0.90 kN) IN ANY DIRECTION AT ANY PLACE OF TOP MEMBER.
W= DISTRIBUTED LOAD OF 50 PLF (0.73 kN/m) AT TOP MEMBER
THIS LOAD MUST BE TRANSFERRED THROUGH THE SUPPORT TO THE STRUCTURE.

WIND VELOCITY AS PER FBC–2020 (7th EDITION) CATEGORY 2; V=175 MPH; EXPOSURE: ”C”

- STAIRWAYS SHALL HAVE A HEADROOM CLEARANCE OF NOT LESS THAN 80 INCHES MEASURED VERTICALLY FROM A LINE CONNECTING THE EDGE OF THE TREAD’S NOSING. SUCH HEADROOM SHALL BE CONTINUOUS ABOVE THE STAIRWAY TO THE POINT WHERE THE LINE INTERSECTS THE LANDING BELOW, ONE TREAD DEPTH BEYOND THE BOTTOM RISER. THE MINIMUM CLEARANCE SHALL BE MAINTAINED THE FULL WIDTH OF THE STAIRWAY AND LANDING.
- THE EXISTING STRUCTURE MUST SUPPORT THE LOADS IMPOSED BY THE SYSTEM OR SYSTEMS. ENGINEER ON RECORD OF THE BUILDING SHALL VERIFY THE STRUCTURE FOR SUCH LOADINGS.
- THE ENGINEER HAS EXCLUSIVELY DESIGNED THE STRUCTURE AND/OR BUILDING COMPONENTS IN COMPLIANCE WITH FBC–2020 (7th ED) AND DESIGN STANDARDS FOR STRUCTURAL REQUIREMENTS ONLY. THE EXISTING STRUCTURE MUST SUPPORT THE LOADS IMPOSED BY THE SYSTEM OR SYSTEMS. ENGINEER ON RECORD OF THE BUILDING SHALL VERIFY THE STRUCTURE FOR SUCH LOADINGS.
- ENGINEER’S VISITS TO THE SITE DURING CONSTRUCTION SHALL BE SCHEDULED WITHIN 48 HOURS PRIOR TO INSPECTION.
- REPRODUCTION OR USE FOR ANY PURPOSE OTHER THAN THAT AUTHORIZED BY THE ENGINEER IS PROHIBITED.

STAINLESS STEEL


- STAINLESS STEEL HAS BEEN DESIGNED IN ACCORDANCE WITH THE FBC–2020 (7th ED), ASTM A176–85a, ASTM A240–86, ASTM A276–85a, ASTM A666–84 AND ASTM F593.
STAINLESS STEEL SS30400 OR SS31600.....Fy=30 ksi, (YIELD STRENGTH)
STAINLESS STEEL SS32101Fy=65 ksi (YIELD STRENGTH)
STAINLESS STEEL SS32304Fy=58 ksi (YIELD STRENGTH)
STAINLESS STEEL SS32205Fy=65 ksi (YIELD STRENGTH)
- WELDING:**
ALL WELDING SHALL BE PERFORMED IN ACCORDANCE WITH THE REQUIREMENTS OF THE AWS CODE, D1.6, STRUCTURAL WELDING–STAINLESS STEEL, LATEST EDITION, AND SHALL BE PERFORMED BY CURRENTLY AWS CERTIFIED OPERATORS. ELECTRODES TO BE AWS E309 OR E318. (80 ksi TENSILE STRENGTHS). FIELD WELDING SHALL BE INSPECTED BY AN INDEPENDENT TESTING LABORATORY RETAINED BY THE OWNER.
- ALL CONNECTIONS TO BE WELDED SHALL BE 3/16” FILLET WELD MINIMUM U.N.O. WELDED SURFACES SHALL BE PREPARED AND REFINISHED AS REQUIRED BY THE AWS D1.6 CODE SPECIFICATIONS.
- BOLTED CONNECTIONS SHALL BE MADE USING HIGH STRENGTH STAINLESS STEEL BOLTS CONFORMING TO ASTM F593.

GLASS

- ALL GLASS IN THIS PROJECT WILL BE SAFETY GLASS ACCORDING TO FBC–2020 (7th ED) RESIDENTIAL.
- LAMINATED GLASS 9/16” NOMINAL. COMPOSED OF (2) 1/4” FULLY TEMPERED GLASS WITH 1/16 IONOPLAST STRUCTURAL INTERLAYER FILM.
- FULLY TEMPERED GLASS AND LAMINATED GLASS SHALL COMPLY WITH CATEGORY II OF CPSC 16 CFR 1201 OR MUST PASS ANSI Z97.1, LAB TEST.
- PROVIDE END CAPS TO ALL TOP RAILS.
- RAILING SHALL BE INSTALLED ACCORDING TO MANUFACTURE’S GUIDELINES.

WOOD

- ALL WOOD MEMBERS TO HAVE A MINIMUM ALLOWABLE BENDING STRENGTH OF (Fb=1700 PSI), AND A MINIMUM SHEAR STRENGTH OF (Fv=175 PSI).

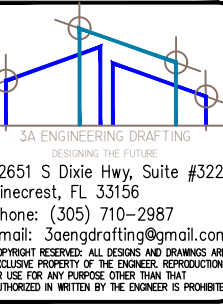

ALAYM AGUILAR, PE
Lic. No–92154
Alaym Aguilar, Professional Engineer,
State of Florida, License No. 92154.
This item has been digitally signed
and sealed by Alaym Aguilar, PE, on
the date provided on the signature.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies.


PROJECT NAME: 704 SE 7 ST.
TYPE OF PROJECT: Misc. Shop Drawings
SHEET NAME: Cover Page and General Notes
PROJECT LOCATION: 704 SE 7 St, Fort Lauderdale, FL 33316
CLIENT NAME: Heylin Gonzalez

REVISIONS	DATE	
		△

MISC. SHOP DRAWING
DRAWN: Y.L
CHECKED: A.A.
SCALE: AS SHOWN
JOB NO: 23–207
DATE: 8/18/2023

SHEET No.:


SD0.0

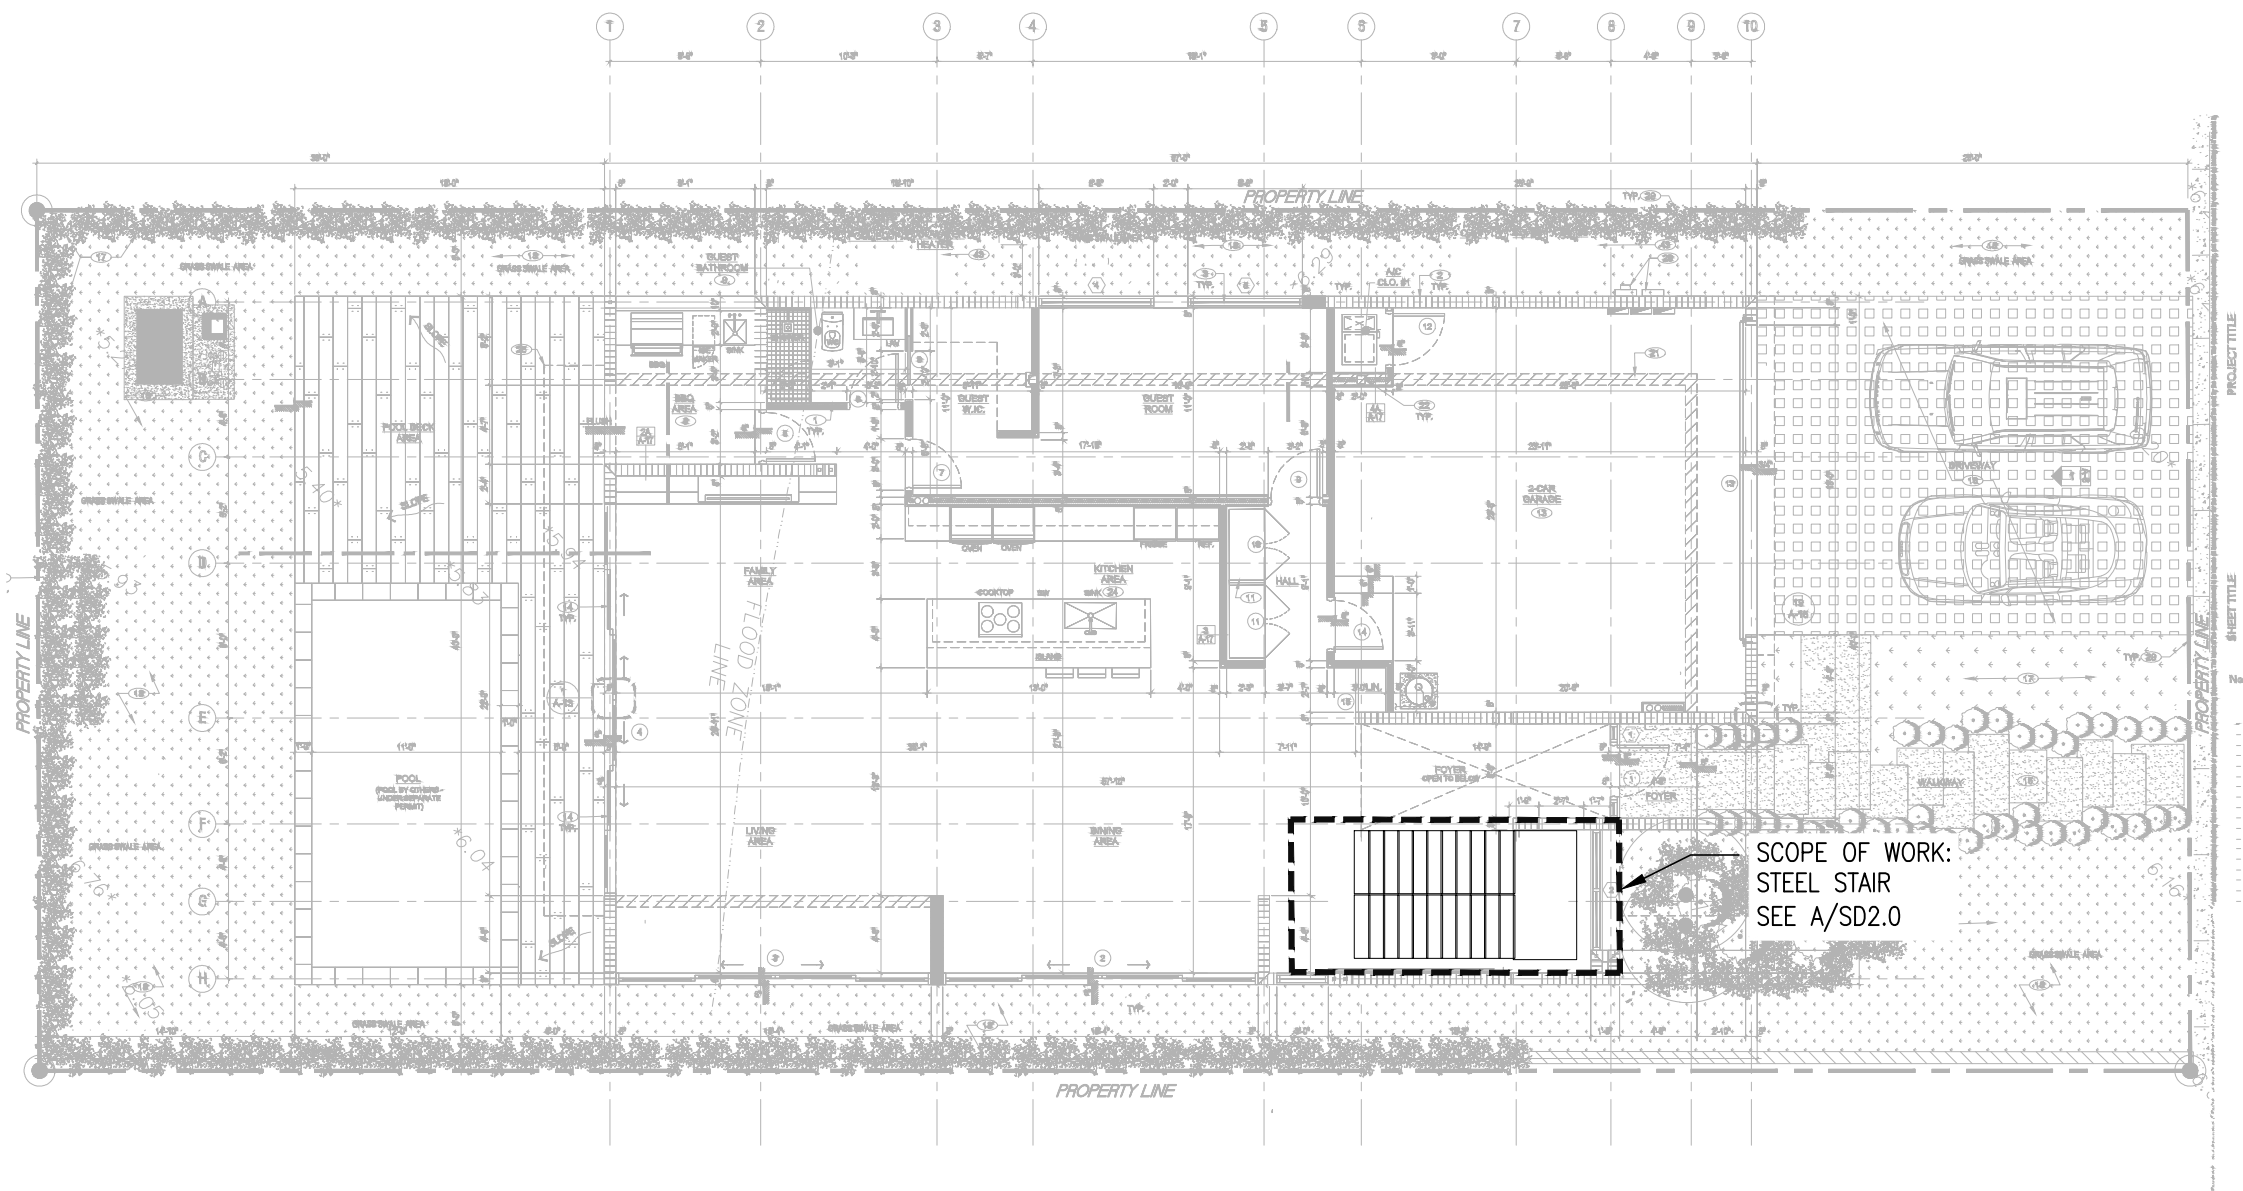

A
SD1.0

SCOPE OF WORK: 1ST FLOOR
SCALE: 1/16"=1'-0"





3A ENGINEERING DRAFTING
DESIGNING THE FUTURE
12651 S Dixie Hwy, Suite #322
Pinecrest, FL 33156
Phone: (305) 710-2987
email: 3aengdrafting@gmail.com
COPYRIGHT RESERVED: ALL DESIGNS AND DRAWINGS ARE
EXCLUSIVE PROPERTY OF THE ENGINEER. REPRODUCTION
OR USE FOR ANY PURPOSE OTHER THAN THAT
AUTHORIZED IN WRITTEN BY THE ENGINEER IS PROHIBITED


ALAYM AGUILAR, PE
Lic. No-92154
Alaym Aguilar, Professional Engineer,
State of Florida, License No. 92154.
This item has been digitally signed
and sealed by Alaym Aguilar, PE, on
the date provided on the signature.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies.

PROJECT NAME:	704 SE 7 ST.
TYPE OF PROJECT:	Misc. Shop Drawings
SHEET NAME:	Scope of Work: 1st Floor
PROJECT LOCATION:	704 SE 7 St, Fort Lauderdale, FL 33316
CLIENT NAME:	Heylin Gonzalez

REVISIONS	DATE	

MISC. SHOP DRAWING
DRAWN: Y.L
CHECKED: A.A.
SCALE: AS SHOWN
JOB NO: 23-207
DATE: 8/18/2023

SHEET No.:
SD1.0

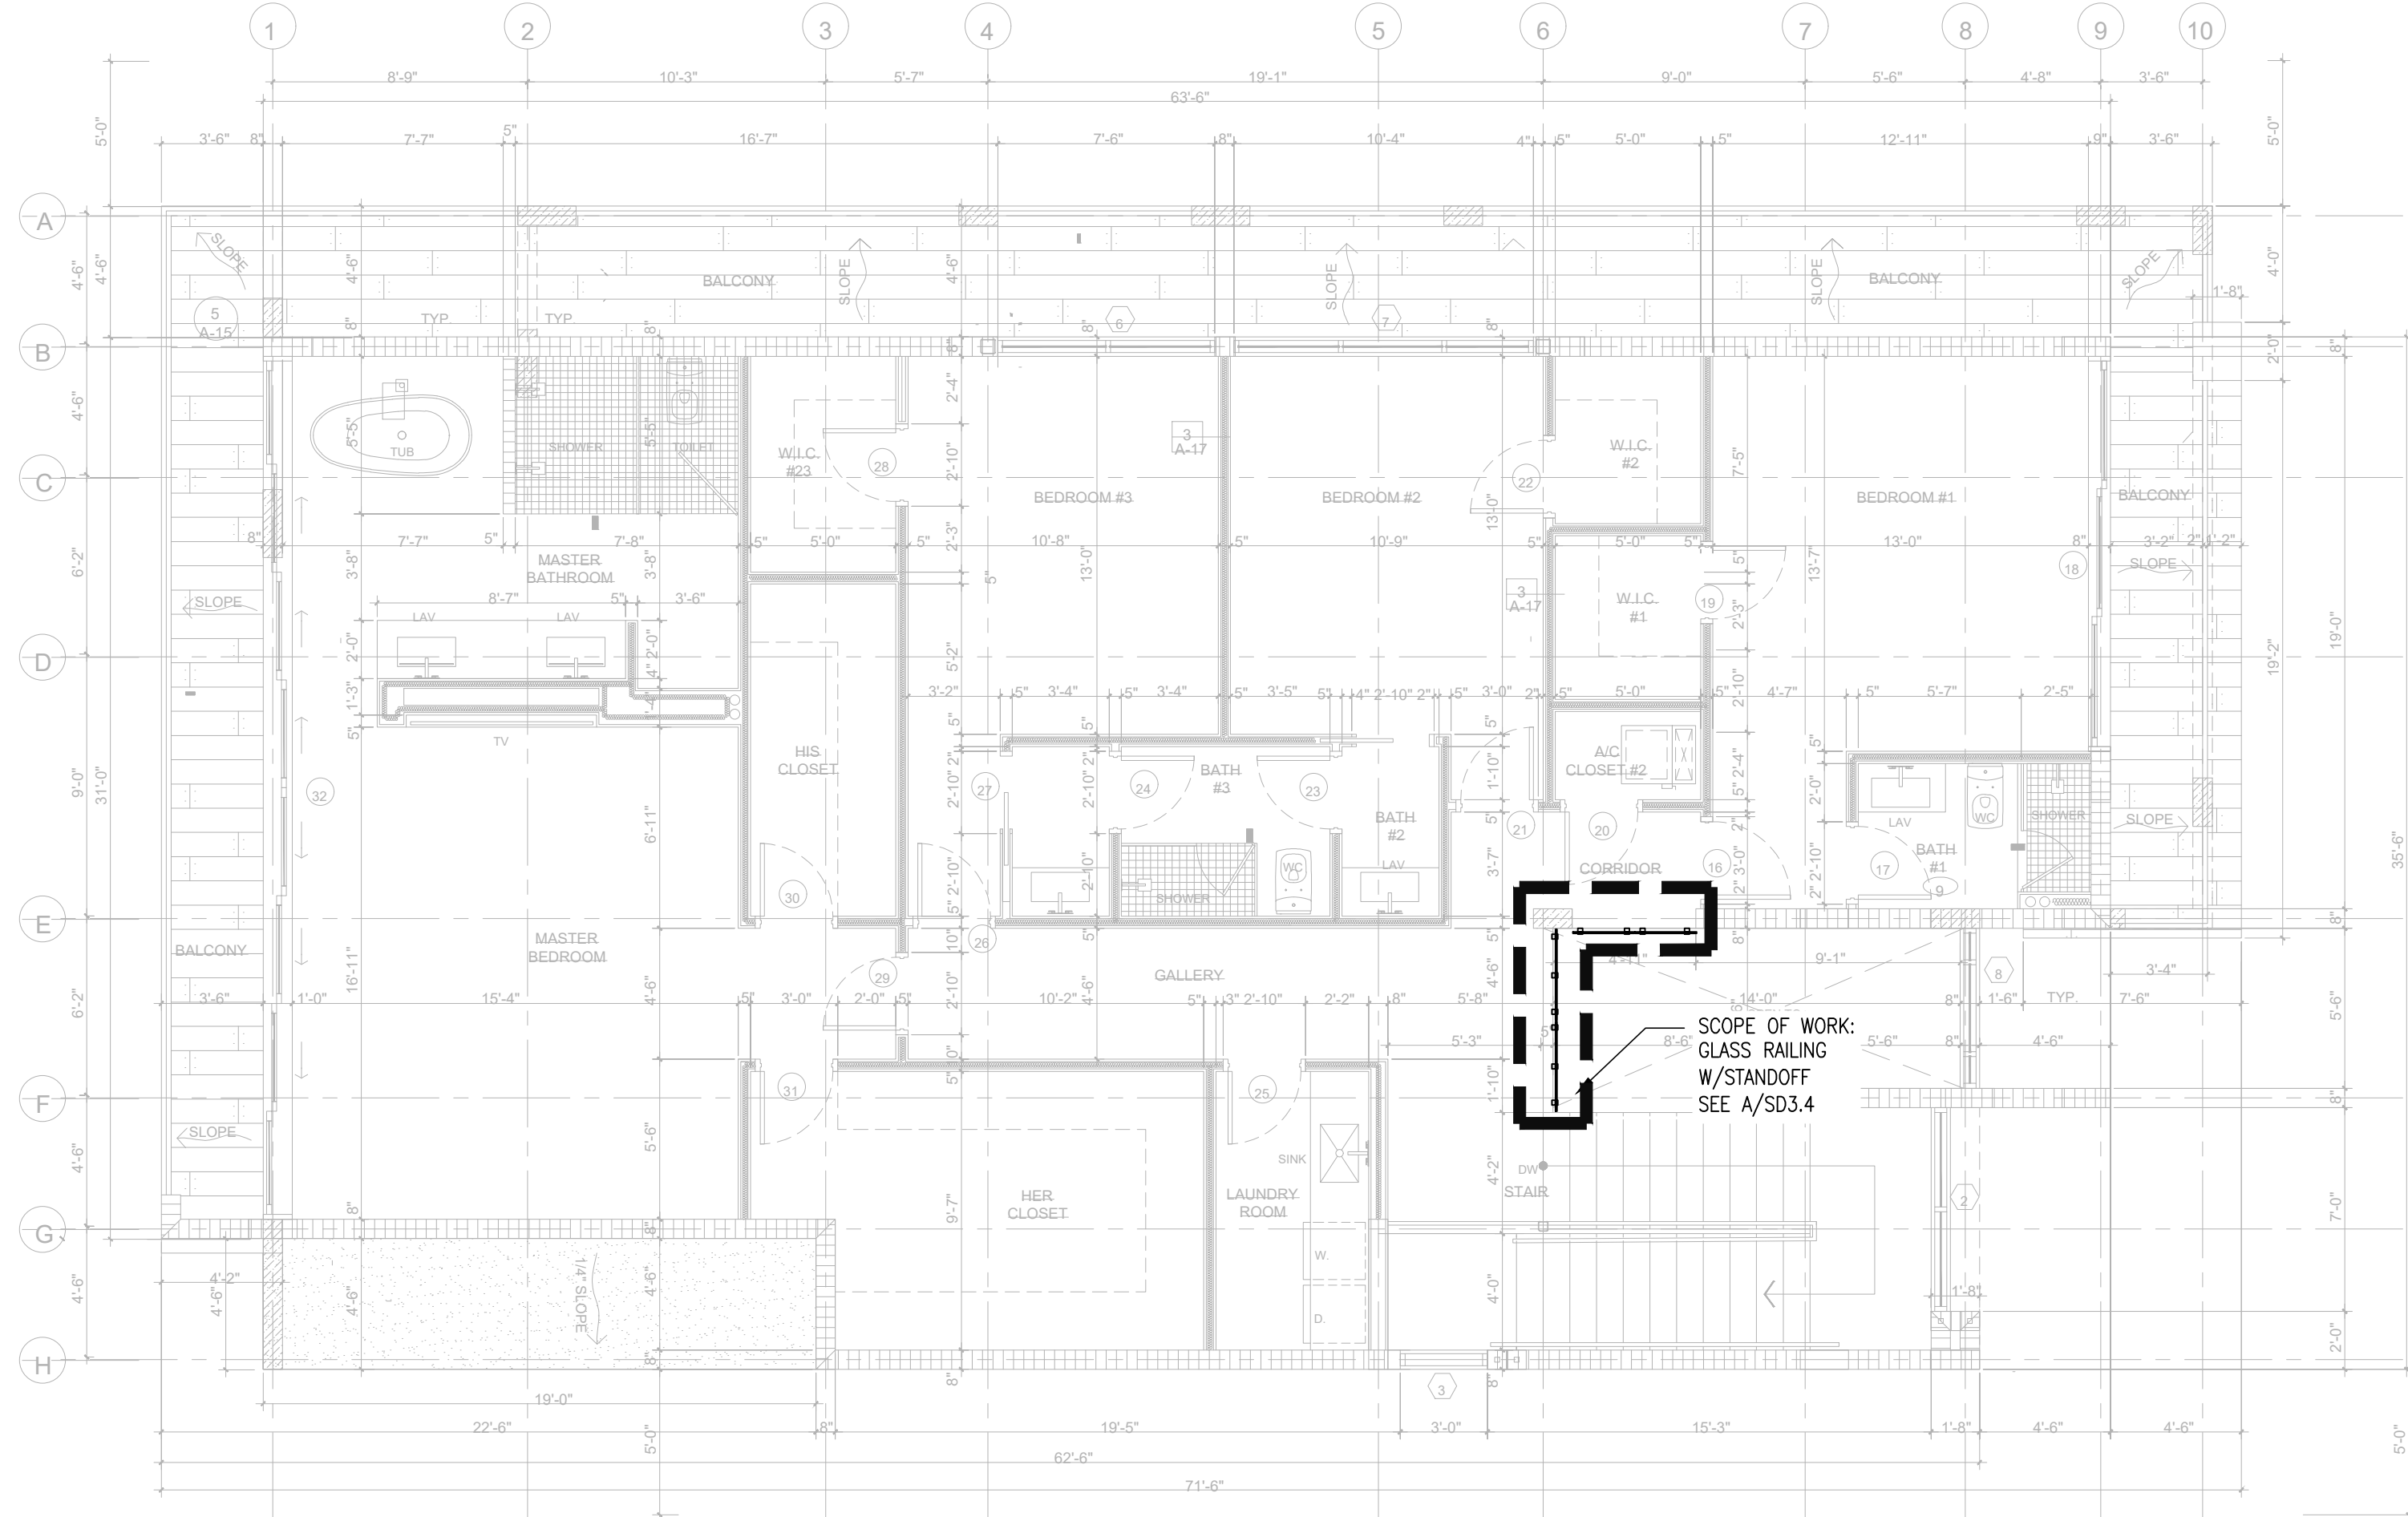

3A ENGINEERING DRAFTING
DESIGNING THE FUTURE
12651 S Dixie Hwy, Suite #322
Pinecrest, FL 33156
Phone: (305) 710-2987
email: 3aengdrafting@gmail.com
COPYRIGHT RESERVED: ALL DESIGNS AND DRAWINGS ARE
EXCLUSIVE PROPERTY OF THE ENGINEER. REPRODUCTION
OR USE FOR ANY PURPOSE OTHER THAN THAT
AUTHORIZED IN WRITTEN BY THE ENGINEER IS PROHIBITED

ALAYM AGUILAR, PE
Lic. No-92154
Alaym Aguilar, Professional Engineer,
State of Florida, License No. 92154.
This item has been digitally signed
and sealed by Alaym Aguilar, PE, on
the date provided on the signature.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies.

PROJECT NAME:	704 SE 7 ST.
TYPE OF PROJECT:	Misc. Shop Drawings
SHEET NAME:	Scope of Work: 2nd Floor
PROJECT LOCATION:	704 SE 7 St. Fort Lauderdale, FL 33316
CLIENT NAME:	Heylin Gonzalez

REVISIONS	DATE	

MISC. SHOP DRAWING
DRAWN: Y.L.
CHECKED: A.A.
SCALE: AS SHOWN
JOB NO: 23-207
DATE: 8/18/2023


SHEET No.:
SD1.1

A
SD1.1

SCOPE OF WORK:2ND FLOOR

SCALE: 3/16"=1'-0"



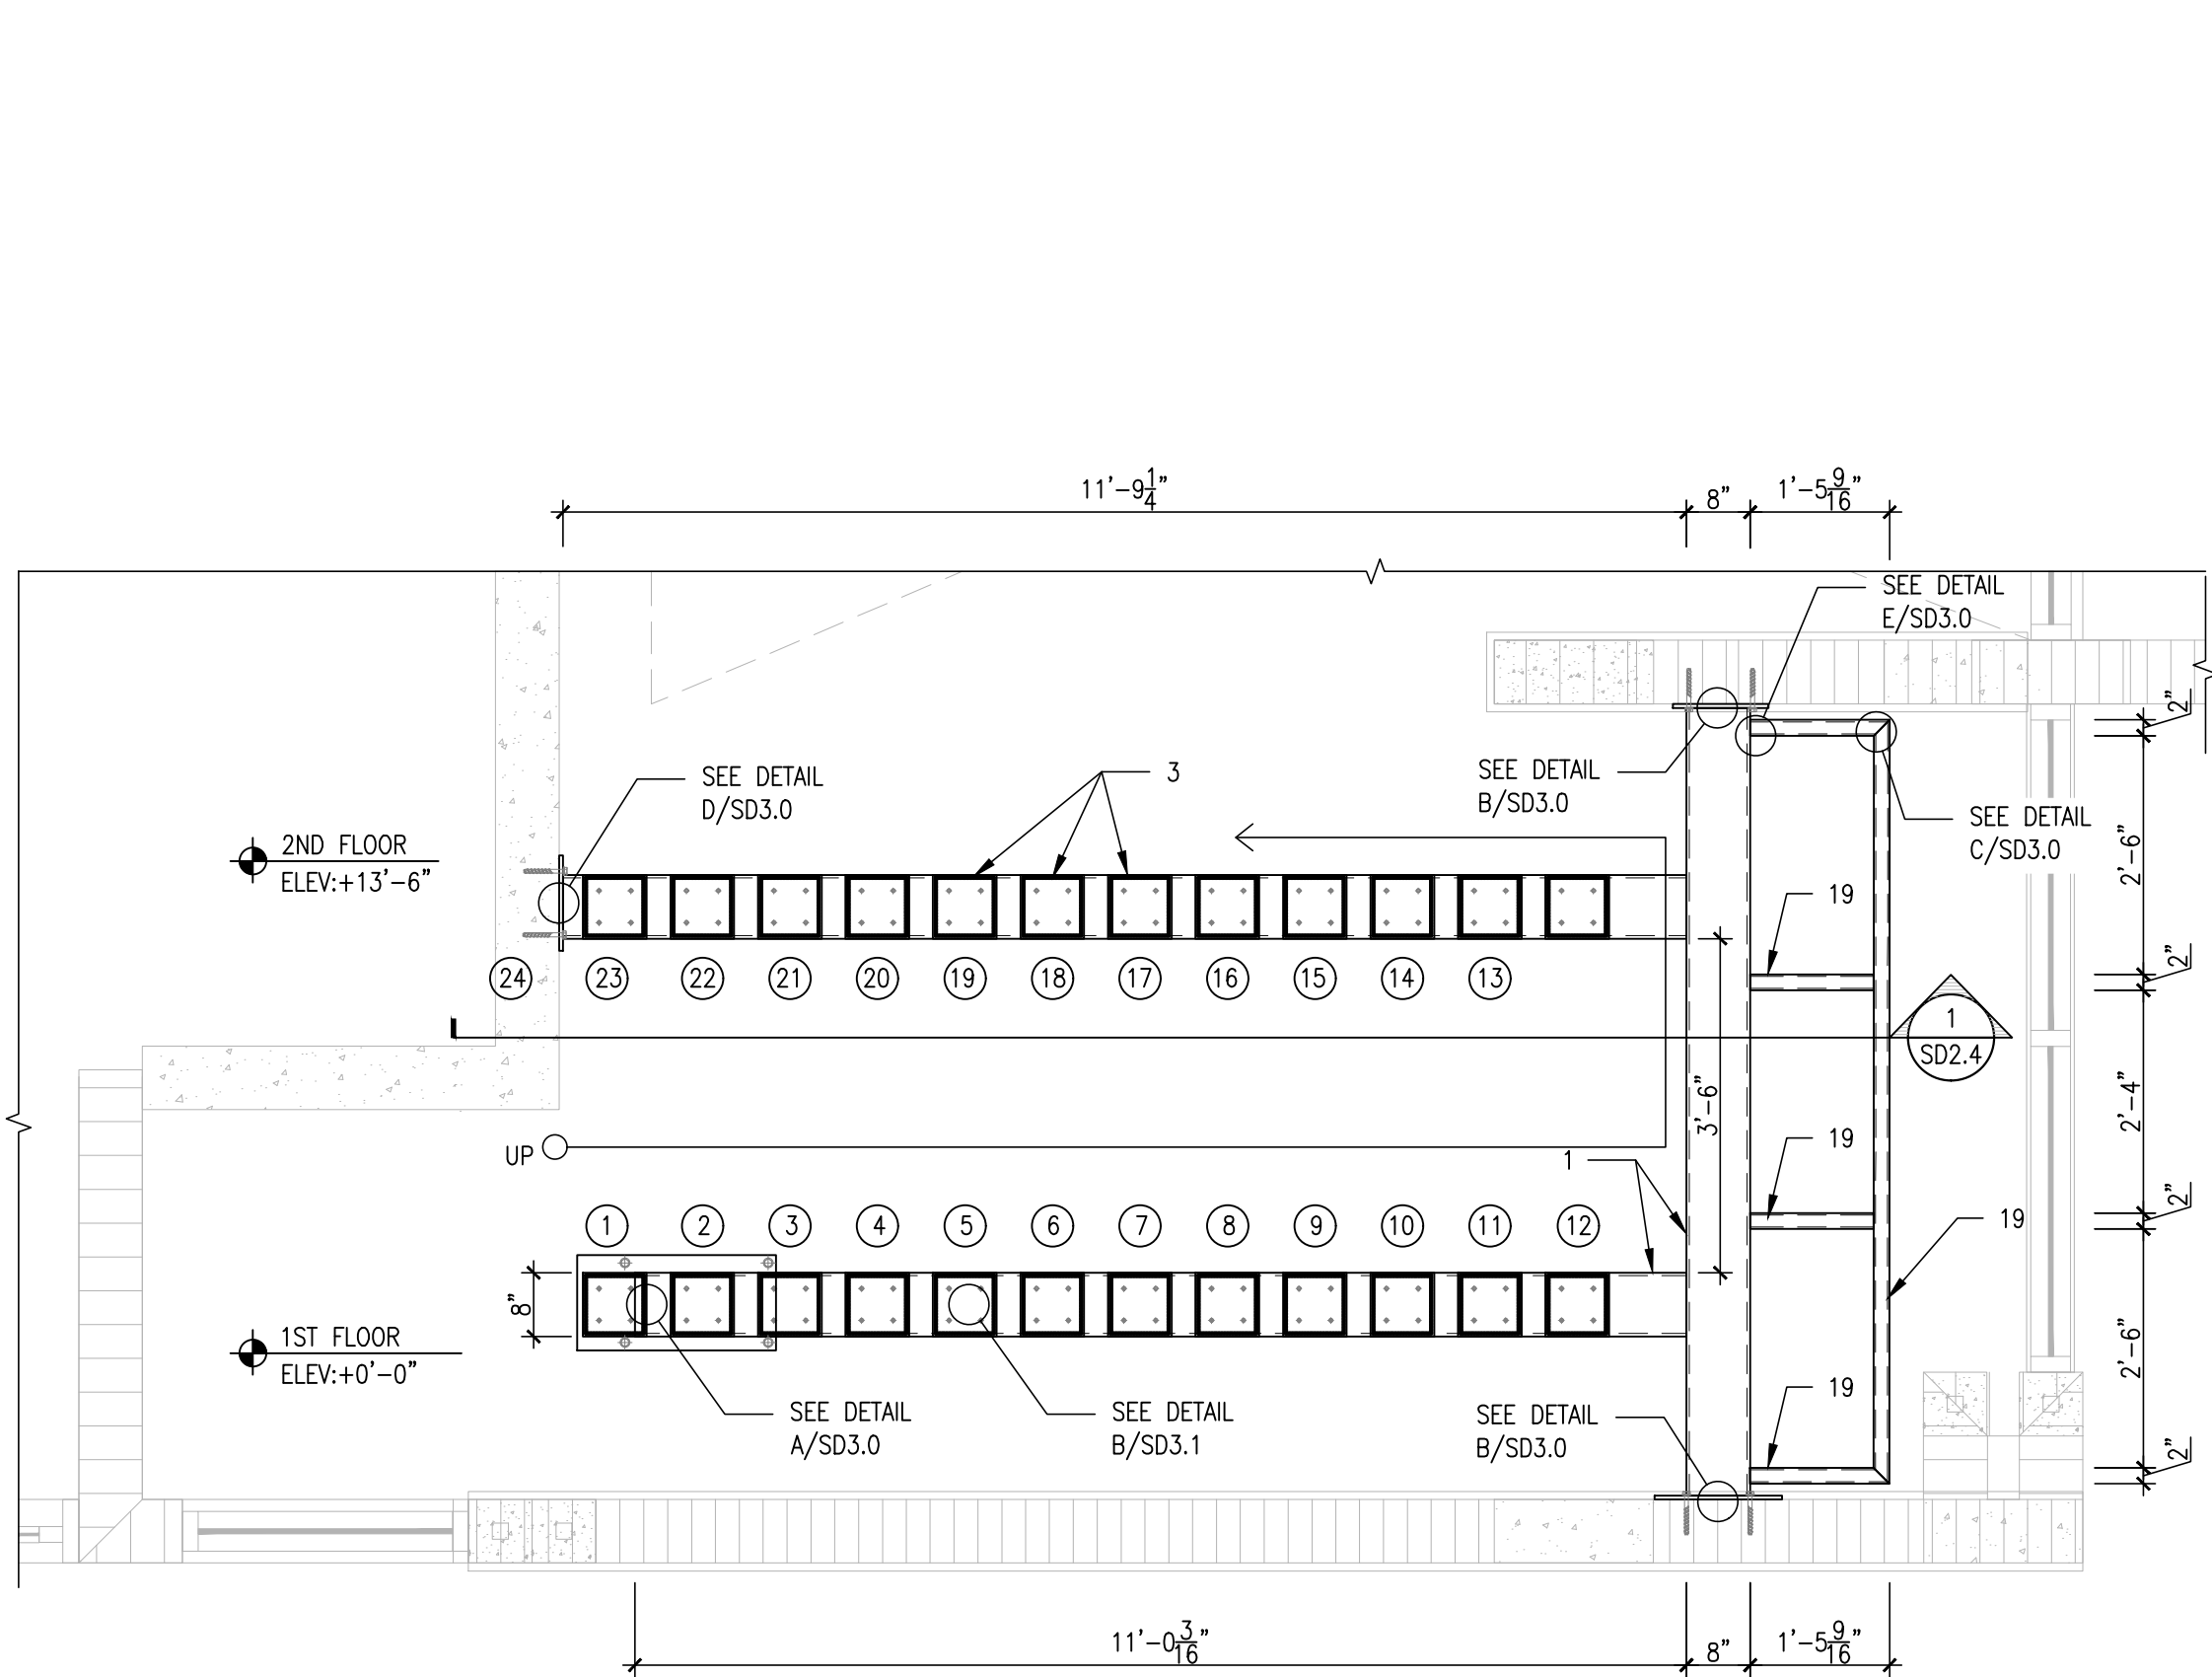

- STAIR LEGEND:**
1. STRINGER HSS8x8x $\frac{3}{8}$ ASTM A500 Gr.B
 2. 11"x4"x45" WOOD TREAD BY OTHER.
 3. STEEL TREADS SUPPORT HSS8x8x $\frac{1}{4}$ ASTM A500 GR. B (TYP)
 4. STEEL PLATE $\frac{1}{2}$ "x25"x12" ASTM A36 (TYP.)
 5. STEEL PLATE $\frac{1}{2}$ "x16"x16" ASTM A36 (TYP.)
 6. $\varnothing\frac{5}{8}$ "x6 $\frac{1}{2}$ " KWIK HUS-EZ (KH-EZ) W/5" MIN EMBEDMENT &4" MIN EDGE DIST (TYP)
 7. LANDING 36"x4"x95" WOOD TREAD BY OTHER.
 8. SS30400 $\varnothing$ 2" STANDOFF BY CR-LAURENCE (typ.)
 9. 9/16" LAMINATED TEMPERED GLASS PANEL. SEE GLASS NOTES FOR SPECS (typ)
 10. STEEL PLATE $\frac{1}{2}$ "x9"x1 $\frac{1}{2}$ " WELDED TO TREAD (TYP)
 11. STEEL PLATE $\frac{1}{2}$ "x6"x21" ASTM A36 (TYP.)
 12. SS304 CONTINUOS HANDRAIL 1 $\frac{1}{2}$ "x $\frac{1}{8}$ " (TYP.)
 13. STEEL PLATE $\frac{1}{4}$ "x7 $\frac{1}{2}$ "x7 $\frac{1}{2}$ " ASTM A36 (TYP.)
 14. $\varnothing\frac{3}{8}$ "x THRU BOLT ASTM A307.
 15. STEEL PLATE $\frac{1}{2}$ "x12"x14" ASTM A36 (TYP.)
 16. $\varnothing\frac{3}{8}$ "x3 TAPCON ANCHOR BOLT. FILL C.M.U CELL W/ 3000 PSI GROUT AS PER MIN. SPECS.
 17. SS31600 BRACKET MALIBU SERIES @42" O.C MAX.
 18. $\varnothing\frac{3}{8}$ "x4" HILTI KH-EX SCREW ANCHOR W/3 $\frac{1}{4}$ " EMBEDMENT, 3" MIN. EDGE DIST & 4" SPACING O.C (typ)
 19. STEEL TUBE HSS2x4x $\frac{1}{4}$ A500 Gr.B
- NOTES:**
1. FIELD VERIFY ALL DIMENSIONS PRIOR TO FABRICATION.
 2. ALL CONNECTION $\frac{1}{4}$ " FILLET WELD U.N.O ON DETAILS.
 3. FINISH COLOR BY OWNER/CONTRACTOR.

3A ENGINEERING DRAFTING
DESIGNING THE FUTURE
12651 S Dixie Hwy, Suite #322
Pinecrest, FL 33156
Phone: (305) 710-2987
email: 3aengdrafting@gmail.com
COPYRIGHT RESERVED: ALL DESIGNS AND DRAWINGS ARE EXCLUSIVE PROPERTY OF THE ENGINEER. REPRODUCTION OR USE FOR ANY PURPOSE OTHER THAN THAT AUTHORIZED IN WRITTEN BY THE ENGINEER IS PROHIBITED

ALAYM AGUILAR, PE
Lic. No-92154
Alaym Aguilar, Professional Engineer,
State of Florida, License No. 92154.
This item has been digitally signed
and sealed by Alaym Aguilar, PE, on
the date provided on the signature.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies.


PROJECT NAME:	704 SE 7 ST.
TYPE OF PROJECT:	Misc. Shop Drawings
SHEET NAME:	Steel Stair Frame Plan View
PROJECT LOCATION:	704 SE 7 St, Fort Lauderdale, FL 33316
CLIENT NAME:	Heylin Gonzalez

REVISIONS	DATE	

MISC. SHOP DRAWING
DRAWN: Y.L
CHECKED: A.A.
SCALE: AS SHOWN
JOB NO: 23-207
DATE: 8/18/2023

SHEET No.:
SD2.0

A STEEL STAIR FRAME PLAN VIEW
SD2.0 SCALE: 1/2"=1'-0"

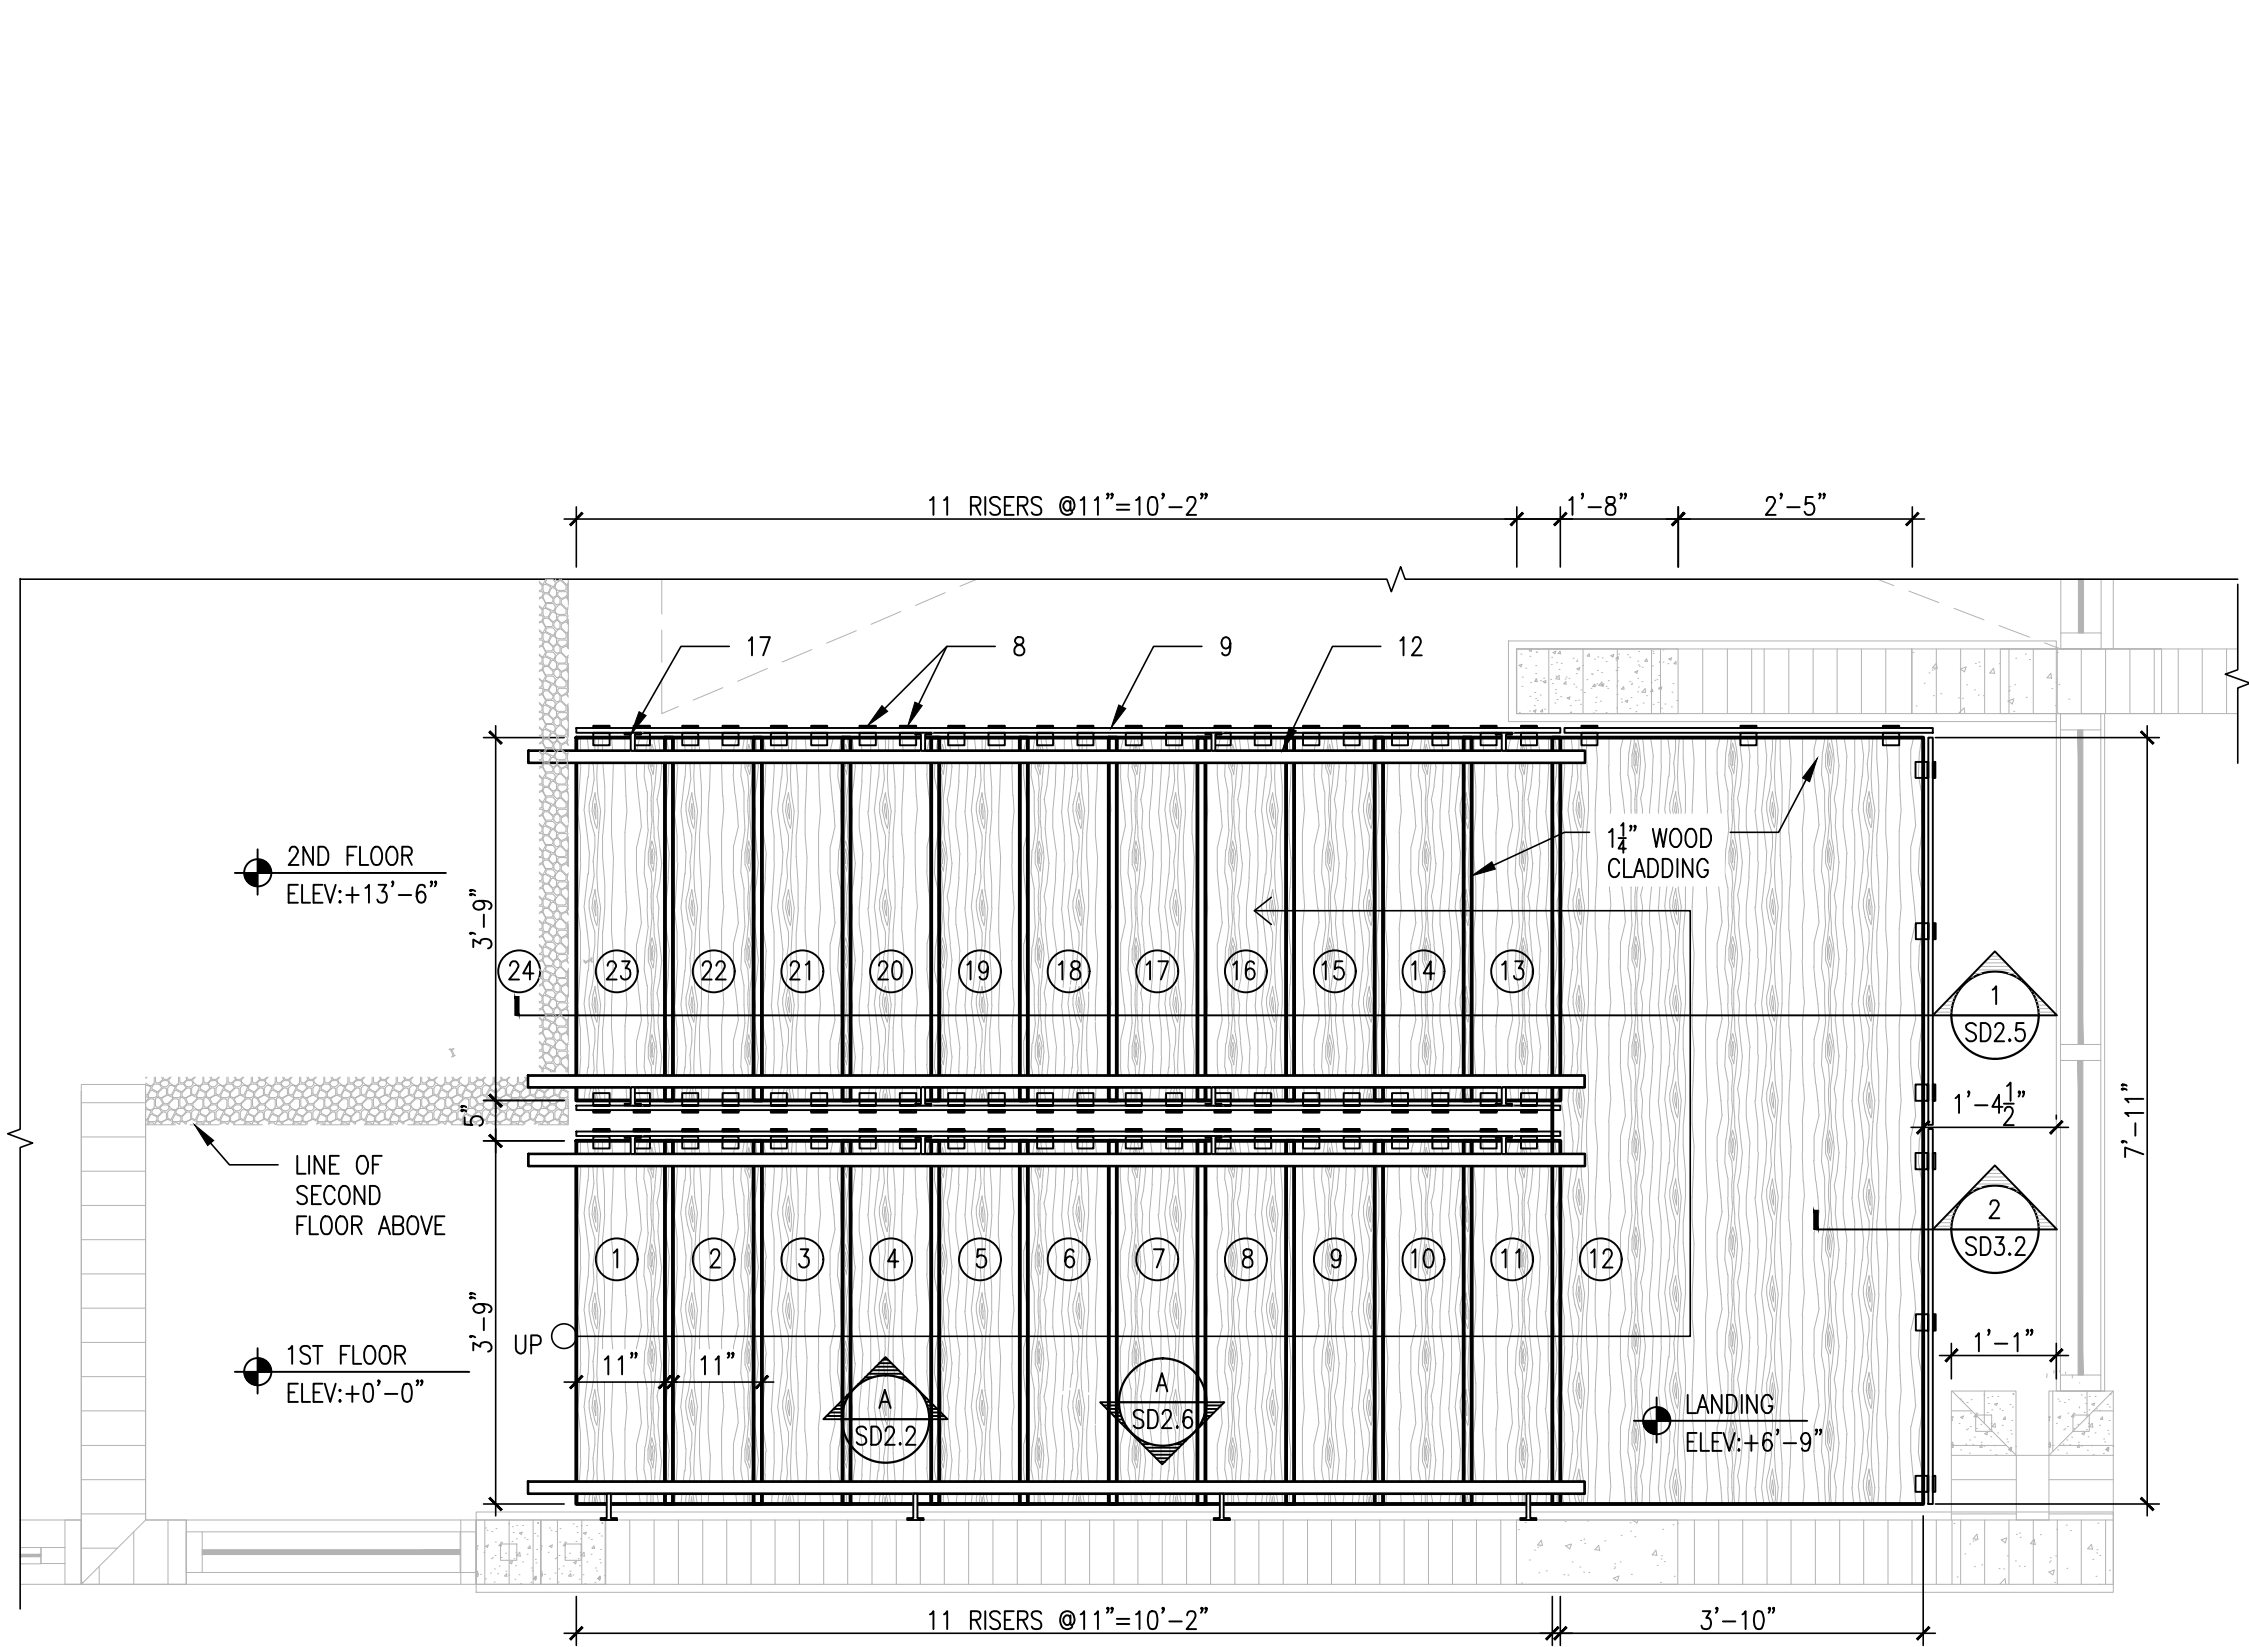

- STAIR LEGEND:**
1. STRINGER HSS8x8x $\frac{3}{8}$ ASTM A500 Gr.B
 2. 11"x4"x45" WOOD TREAD BY OTHER.
 3. STEEL TREADS SUPPORT HSS8x8x $\frac{1}{4}$ ASTM A500 GR. B (TYP)
 4. STEEL PLATE $\frac{1}{2}$ "x25"x12" ASTM A36 (TYP.)
 5. STEEL PLATE $\frac{1}{2}$ "x16"x16" ASTM A36 (TYP.)
 6. $\emptyset\frac{5}{8}$ "x6 $\frac{1}{2}$ " KWIK HUS-EZ (KH-EZ) W/5" MIN EMBEDMENT &4" MIN EDGE DIST (TYP)
 7. LANDING 36"x4"x95" WOOD TREAD BY OTHER.
 8. SS30400 $\emptyset$ 2" STANDOFF BY CR-LAURENCE (typ.)
 9. 9/16" LAMINATED TEMPERED GLASS PANEL. SEE GLASS NOTES FOR SPECS (typ)
 10. STEEL PLATE $\frac{1}{2}$ "x9"x1 $\frac{1}{2}$ " WELDED TO TREAD (TYP)
 11. STEEL PLATE $\frac{1}{2}$ "x6"x21" ASTM A36 (TYP.)
 12. SS304 CONTINUOS HANDRAIL 1 $\frac{1}{2}$ "x $\frac{1}{8}$ " (TYP.)
 13. STEEL PLATE $\frac{1}{4}$ "x7 $\frac{1}{2}$ "x7 $\frac{1}{2}$ " ASTM A36 (TYP.)
 14. $\emptyset\frac{3}{8}$ "x THRU BOLT ASTM A307.
 15. STEEL PLATE $\frac{1}{2}$ "x12"x14" ASTM A36 (TYP.)
 16. $\emptyset\frac{3}{8}$ "x3 TAPCON ANCHOR BOLT. FILL C.M.U CELL W/ 3000 PSI GROUT AS PER MIN. SPECS.
 17. SS31600 BRACKET MALIBU SERIES @42" O.C MAX.
 18. $\emptyset\frac{3}{8}$ "x4" HILTI KH-EX SCREW ANCHOR W/3 $\frac{1}{4}$ " EMBEDMENT, 3" MIN. EDGE DIST & 4" SPACING O.C (typ)
 19. STEEL TUBE HSS2x4x $\frac{1}{4}$ A500 Gr.B

- NOTES:**
1. FIELD VERIFY ALL DIMENSIONS PRIOR TO FABRICATION.
 2. ALL CONNECTION $\frac{1}{4}$ " FILLET WELD U.N.O ON DETAILS.
 3. FINISH COLOR BY OWNER/CONTRACTOR.

3A ENGINEERING DRAFTING
DESIGNING THE FUTURE
12651 S Dixie Hwy, Suite #322
Pinecrest, FL 33156
Phone: (305) 710-2987
email: 3aengdrafting@gmail.com
COPYRIGHT RESERVED: ALL DESIGNS AND DRAWINGS ARE EXCLUSIVE PROPERTY OF THE ENGINEER. REPRODUCTION OR USE FOR ANY PURPOSE OTHER THAN THAT AUTHORIZED IN WRITTEN BY THE ENGINEER IS PROHIBITED

ALAYM AGUILAR, PE
Lic. No-92154
Alaym Aguilar, Professional Engineer,
State of Florida, License No. 92154.
This item has been digitally signed
and sealed by Alaym Aguilar, PE, on
the date provided on the signature.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies.


PROJECT NAME:	704 SE 7 ST.
TYPE OF PROJECT:	Misc. Shop Drawings
SHEET NAME:	Steel Stair Plan View
PROJECT LOCATION:	704 SE 7 St, Fort Lauderdale, FL 33316
CLIENT NAME:	Heylin Gonzalez

REVISIONS	DATE	

MISC. SHOP DRAWING
DRAWN: Y.L
CHECKED: A.A.
SCALE: AS SHOWN
JOB NO: 23-207
DATE: 8/18/2023

SHEET No.:
SD2.1

A STEEL STAIR PLAN VIEW
SD2.1
SCALE: 1/2"=1'-0"

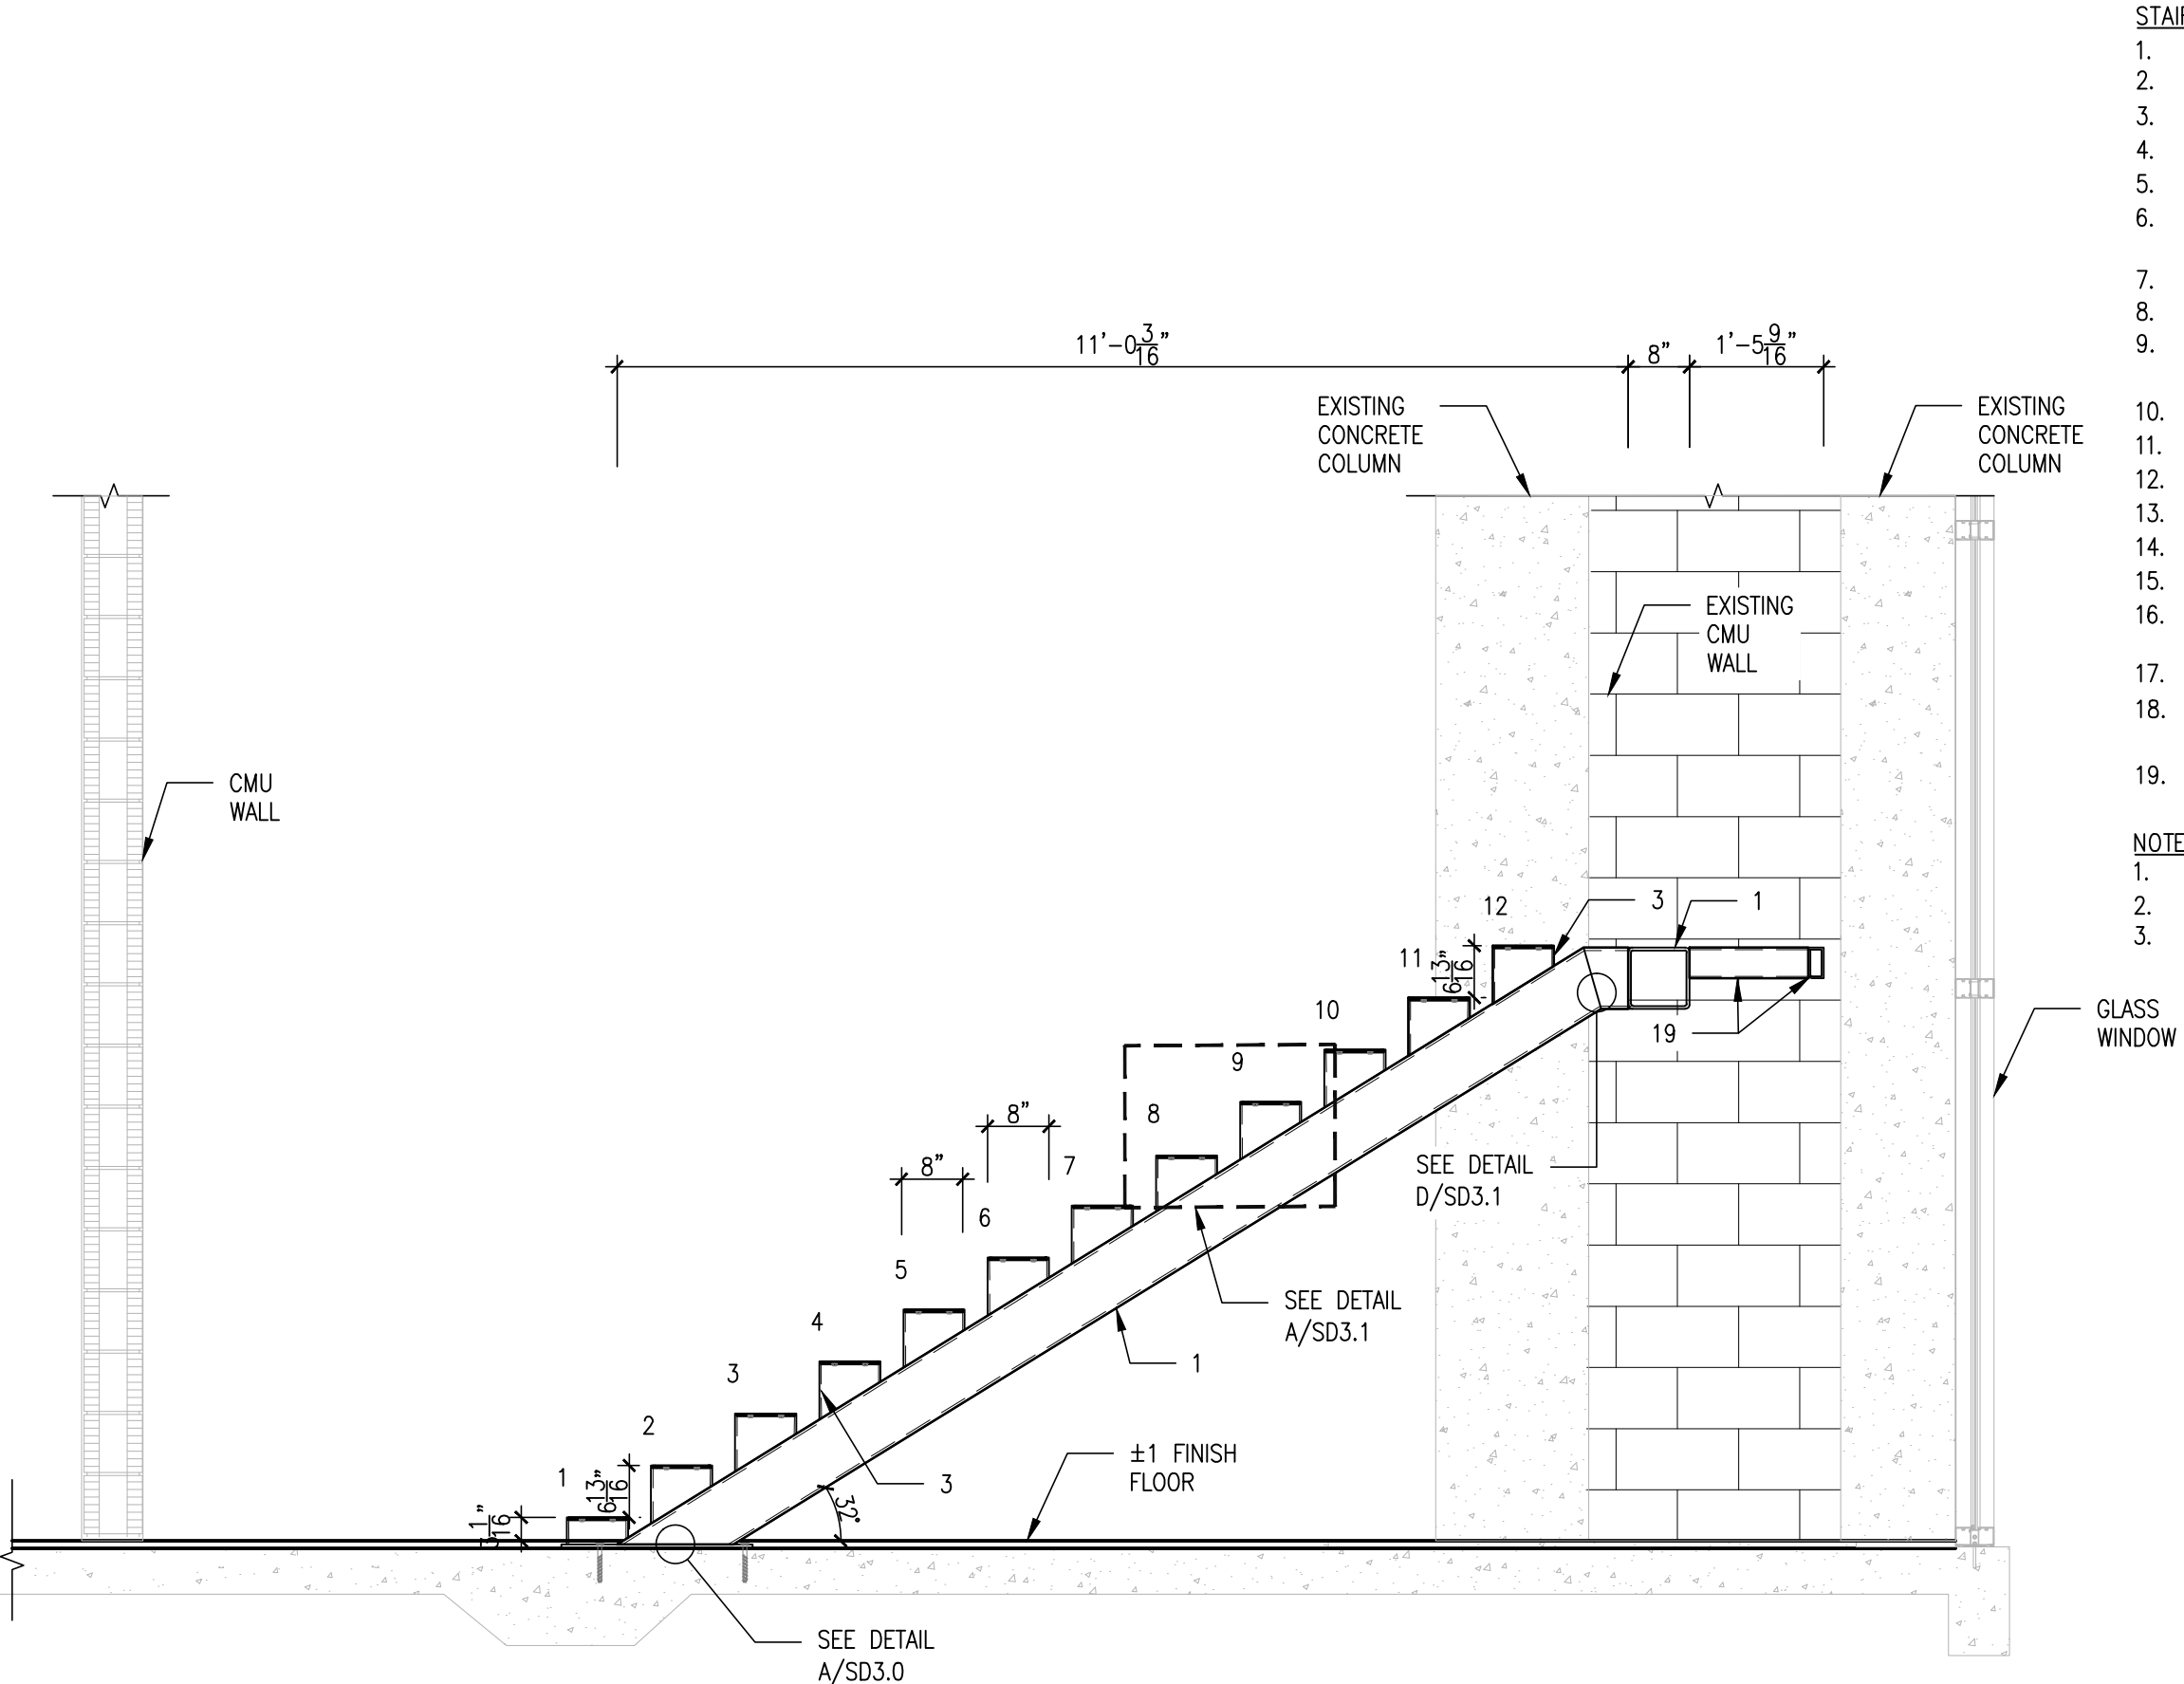

- STAIR LEGEND:**
- 1. STRINGER HSS8x8x $\frac{3}{8}$ ASTM A500 Gr.B
 - 2. 11"x4"x45" WOOD TREAD BY OTHER.
 - 3. STEEL TREADS SUPPORT HSS8x8x $\frac{1}{4}$ ASTM A500 GR. B (TYP)
 - 4. STEEL PLATE $\frac{1}{2}$ "x25"x12" ASTM A36 (TYP.)
 - 5. STEEL PLATE $\frac{1}{2}$ "x16"x16" ASTM A36 (TYP.)
 - 6. $\varnothing\frac{5}{8}$ "x6 $\frac{1}{2}$ " KWIK HUS-EZ (KH-EZ) W/5" MIN EMBEDMENT & 4" MIN EDGE DIST (TYP)
 - 7. LANDING 36"x4"x95" WOOD TREAD BY OTHER.
 - 8. SS30400 $\varnothing$ 2" STANDOFF BY CR-LAURENCE (typ.)
 - 9. 9/16" LAMINATED TEMPERED GLASS PANEL. SEE GLASS NOTES FOR SPECS (typ)
 - 10. STEEL PLATE $\frac{1}{2}$ "x9"x1 $\frac{1}{2}$ " WELDED TO TREAD (TYP)
 - 11. STEEL PLATE $\frac{1}{2}$ "x6"x21" ASTM A36 (TYP.)
 - 12. SS304 CONTINUOS HANDRAIL 1 $\frac{1}{2}$ "x $\frac{1}{8}$ " (TYP.)
 - 13. STEEL PLATE $\frac{1}{4}$ "x7 $\frac{1}{2}$ "x7 $\frac{1}{2}$ " ASTM A36 (TYP.)
 - 14. $\varnothing\frac{3}{8}$ "x THRU BOLT ASTM A307.
 - 15. STEEL PLATE $\frac{1}{2}$ "x12"x14" ASTM A36 (TYP.)
 - 16. $\varnothing\frac{3}{8}$ "x3 TAPCON ANCHOR BOLT. FILL C.M.U CELL W/ 3000 PSI GROUT AS PER MIN. SPECS.
 - 17. SS31600 BRACKET MALIBU SERIES @42" O.C MAX.
 - 18. $\varnothing\frac{3}{8}$ "x4" HILTI KH-EX SCREW ANCHOR W/3 $\frac{1}{4}$ " EMBEDMENT, 3" MIN. EDGE DIST & 4" SPACING O.C (typ)
 - 19. STEEL TUBE HSS2x4x $\frac{1}{4}$ A500 Gr.B

- NOTES:**
- 1. FIELD VERIFY ALL DIMENSIONS PRIOR TO FABRICATION.
 - 2. ALL CONNECTION $\frac{1}{4}$ " FILLET WELD U.N.O ON DETAILS.
 - 3. FINISH COLOR BY OWNER/CONTRACTOR.

3A ENGINEERING DRAFTING
DESIGNING THE FUTURE
12651 S Dixie Hwy, Suite #322
Pinecrest, FL 33156
Phone: (305) 710-2987
email: 3aengdrafting@gmail.com
COPYRIGHT RESERVED: ALL DESIGNS AND DRAWINGS ARE EXCLUSIVE PROPERTY OF THE ENGINEER. REPRODUCTION OR USE FOR ANY PURPOSE OTHER THAN THAT AUTHORIZED IN WRITTEN BY THE ENGINEER IS PROHIBITED

ALAYM AGUILAR, PE
Lic. No-92154
Alaym Aguilar, Professional Engineer,
State of Florida, License No. 92154.
This item has been digitally signed
and sealed by Alaym Aguilar, PE, on
the date provided on the signature.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies.


PROJECT NAME:	704 SE 7 ST.
TYPE OF PROJECT:	Misc. Shop Drawings
SHEET NAME:	Stair Frame Elevation 1 St Flight
PROJECT LOCATION:	704 SE 7 St, Fort Lauderdale, FL 33316
CLIENT NAME:	Heylin Gonzalez

REVISIONS	DATE	

MISC. SHOP DRAWING
DRAWN: Y.L
CHECKED: A.A.
SCALE: AS SHOWN
JOB NO: 23-207
DATE: 8/18/2023

SHEET No.:
SD2.2

A STAIR FRAME ELEVATION 1ST FLIGHT
SD2.2
SCALE: 1/2"=1'-0"

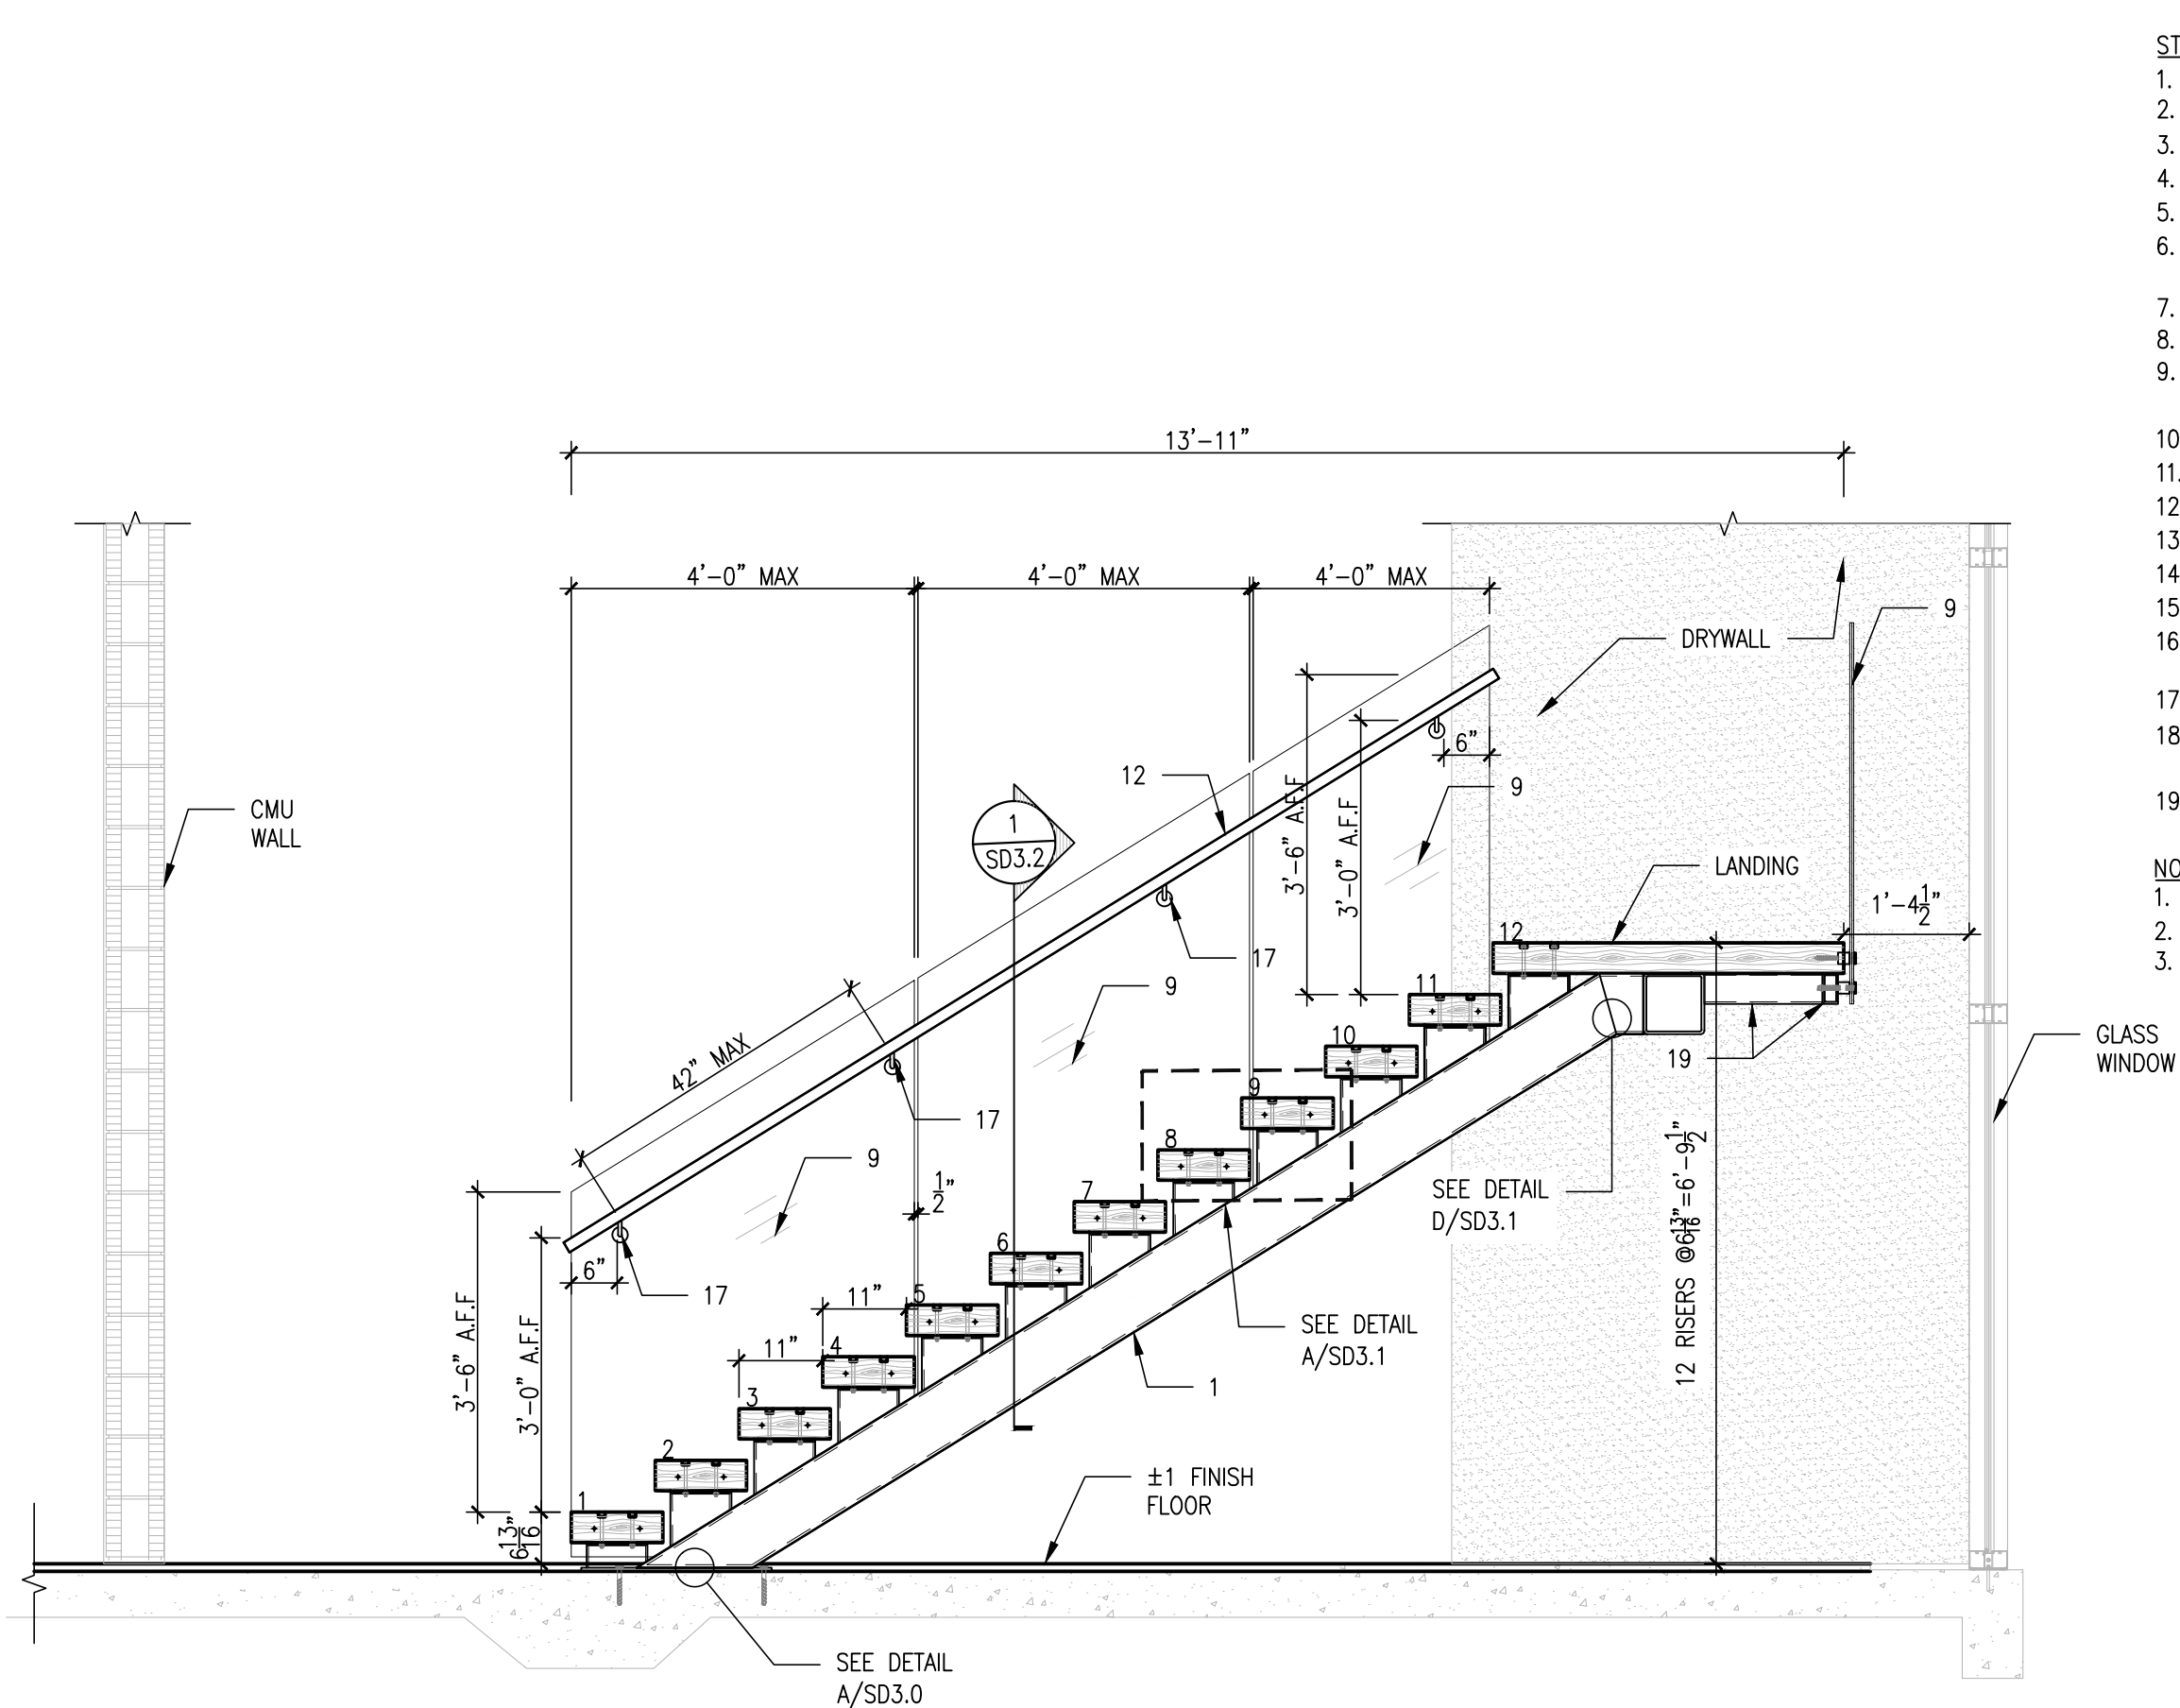

- STAIR LEGEND:**
1. STRINGER HSS8x8x $\frac{3}{8}$ ASTM A500 Gr.B
 2. 11"x4"x45" WOOD TREAD BY OTHER.
 3. STEEL TREADS SUPPORT HSS8x8x $\frac{1}{4}$ ASTM A500 GR. B (TYP)
 4. STEEL PLATE $\frac{1}{2}$ "x25"x12" ASTM A36 (TYP.)
 5. STEEL PLATE $\frac{1}{2}$ "x16"x16" ASTM A36 (TYP.)
 6. $\phi\frac{5}{8}$ "x6 $\frac{1}{2}$ " KWIK HUS-EZ (KH-EZ) W/5" MIN EMBEDMENT & 4" MIN EDGE DIST (TYP)
 7. LANDING 36"x4"x95" WOOD TREAD BY OTHER.
 8. SS30400 ϕ 2" STANDOFF BY CR-LAURENCE (typ.)
 9. 9/16" LAMINATED TEMPERED GLASS PANEL. SEE GLASS NOTES FOR SPECS (typ)
 10. STEEL PLATE $\frac{1}{2}$ "x9"x1 $\frac{1}{2}$ " WELDED TO TREAD (TYP)
 11. STEEL PLATE $\frac{1}{2}$ "x6"x21" ASTM A36 (TYP.)
 12. SS304 CONTINUOS HANDRAIL 1 $\frac{1}{2}$ "x $\frac{1}{8}$ " (TYP.)
 13. STEEL PLATE $\frac{1}{4}$ "x7 $\frac{1}{2}$ "x7 $\frac{1}{2}$ " ASTM A36 (TYP.)
 14. $\phi\frac{3}{8}$ "x THRU BOLT ASTM A307.
 15. STEEL PLATE $\frac{1}{2}$ "x12"x14" ASTM A36 (TYP.)
 16. $\phi\frac{3}{8}$ "x3 TAPCON ANCHOR BOLT. FILL C.M.U CELL W/ 3000 PSI GROUT AS PER MIN. SPECS.
 17. SS31600 BRACKET MALIBU SERIES @42" O.C MAX.
 18. $\phi\frac{3}{8}$ "x4" HILTI KH-EX SCREW ANCHOR W/3 $\frac{1}{4}$ " EMBEDMENT, 3" MIN. EDGE DIST & 4" SPACING O.C (typ)
 19. STEEL TUBE HSS2x4x $\frac{1}{4}$ A500 Gr.B

- NOTES:**
1. FIELD VERIFY ALL DIMENSIONS PRIOR TO FABRICATION.
 2. ALL CONNECTION $\frac{1}{4}$ " FILLET WELD U.N.O ON DETAILS.
 3. FINISH COLOR BY OWNER/CONTRACTOR.

3A ENGINEERING DRAFTING
DESIGNING THE FUTURE
12651 S Dixie Hwy, Suite #322
Pinecrest, FL 33156
Phone: (305) 710-2987
email: 3aengdrafting@gmail.com
COPYRIGHT RESERVED: ALL DESIGNS AND DRAWINGS ARE EXCLUSIVE PROPERTY OF THE ENGINEER. REPRODUCTION OR USE FOR ANY PURPOSE OTHER THAN THAT AUTHORIZED IN WRITTEN BY THE ENGINEER IS PROHIBITED

ALAYM AGUILAR, PE
Lic. No-92154
Alaym Aguilar, Professional Engineer,
State of Florida, License No. 92154.
This item has been digitally signed
and sealed by Alaym Aguilar, PE, on
the date provided on the signature.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies.


PROJECT NAME:	704 SE 7 ST.
TYPE OF PROJECT:	Misc. Shop Drawings
SHEET NAME:	Stair Elevation 1st Flight
PROJECT LOCATION:	704 SE 7 St. Fort Lauderdale, FL 33316
CLIENT NAME:	Heylin Gonzalez

REVISIONS	DATE	

MISC. SHOP DRAWING
DRAWN: Y.L
CHECKED: A.A.
SCALE: AS SHOWN
JOB NO: 23-207
DATE: 8/18/2023


SHEET No.:
SD2.3

A STAIR ELEVATION 1ST FLIGHT
SD2.3
SCALE: 1/2"=1'-0"

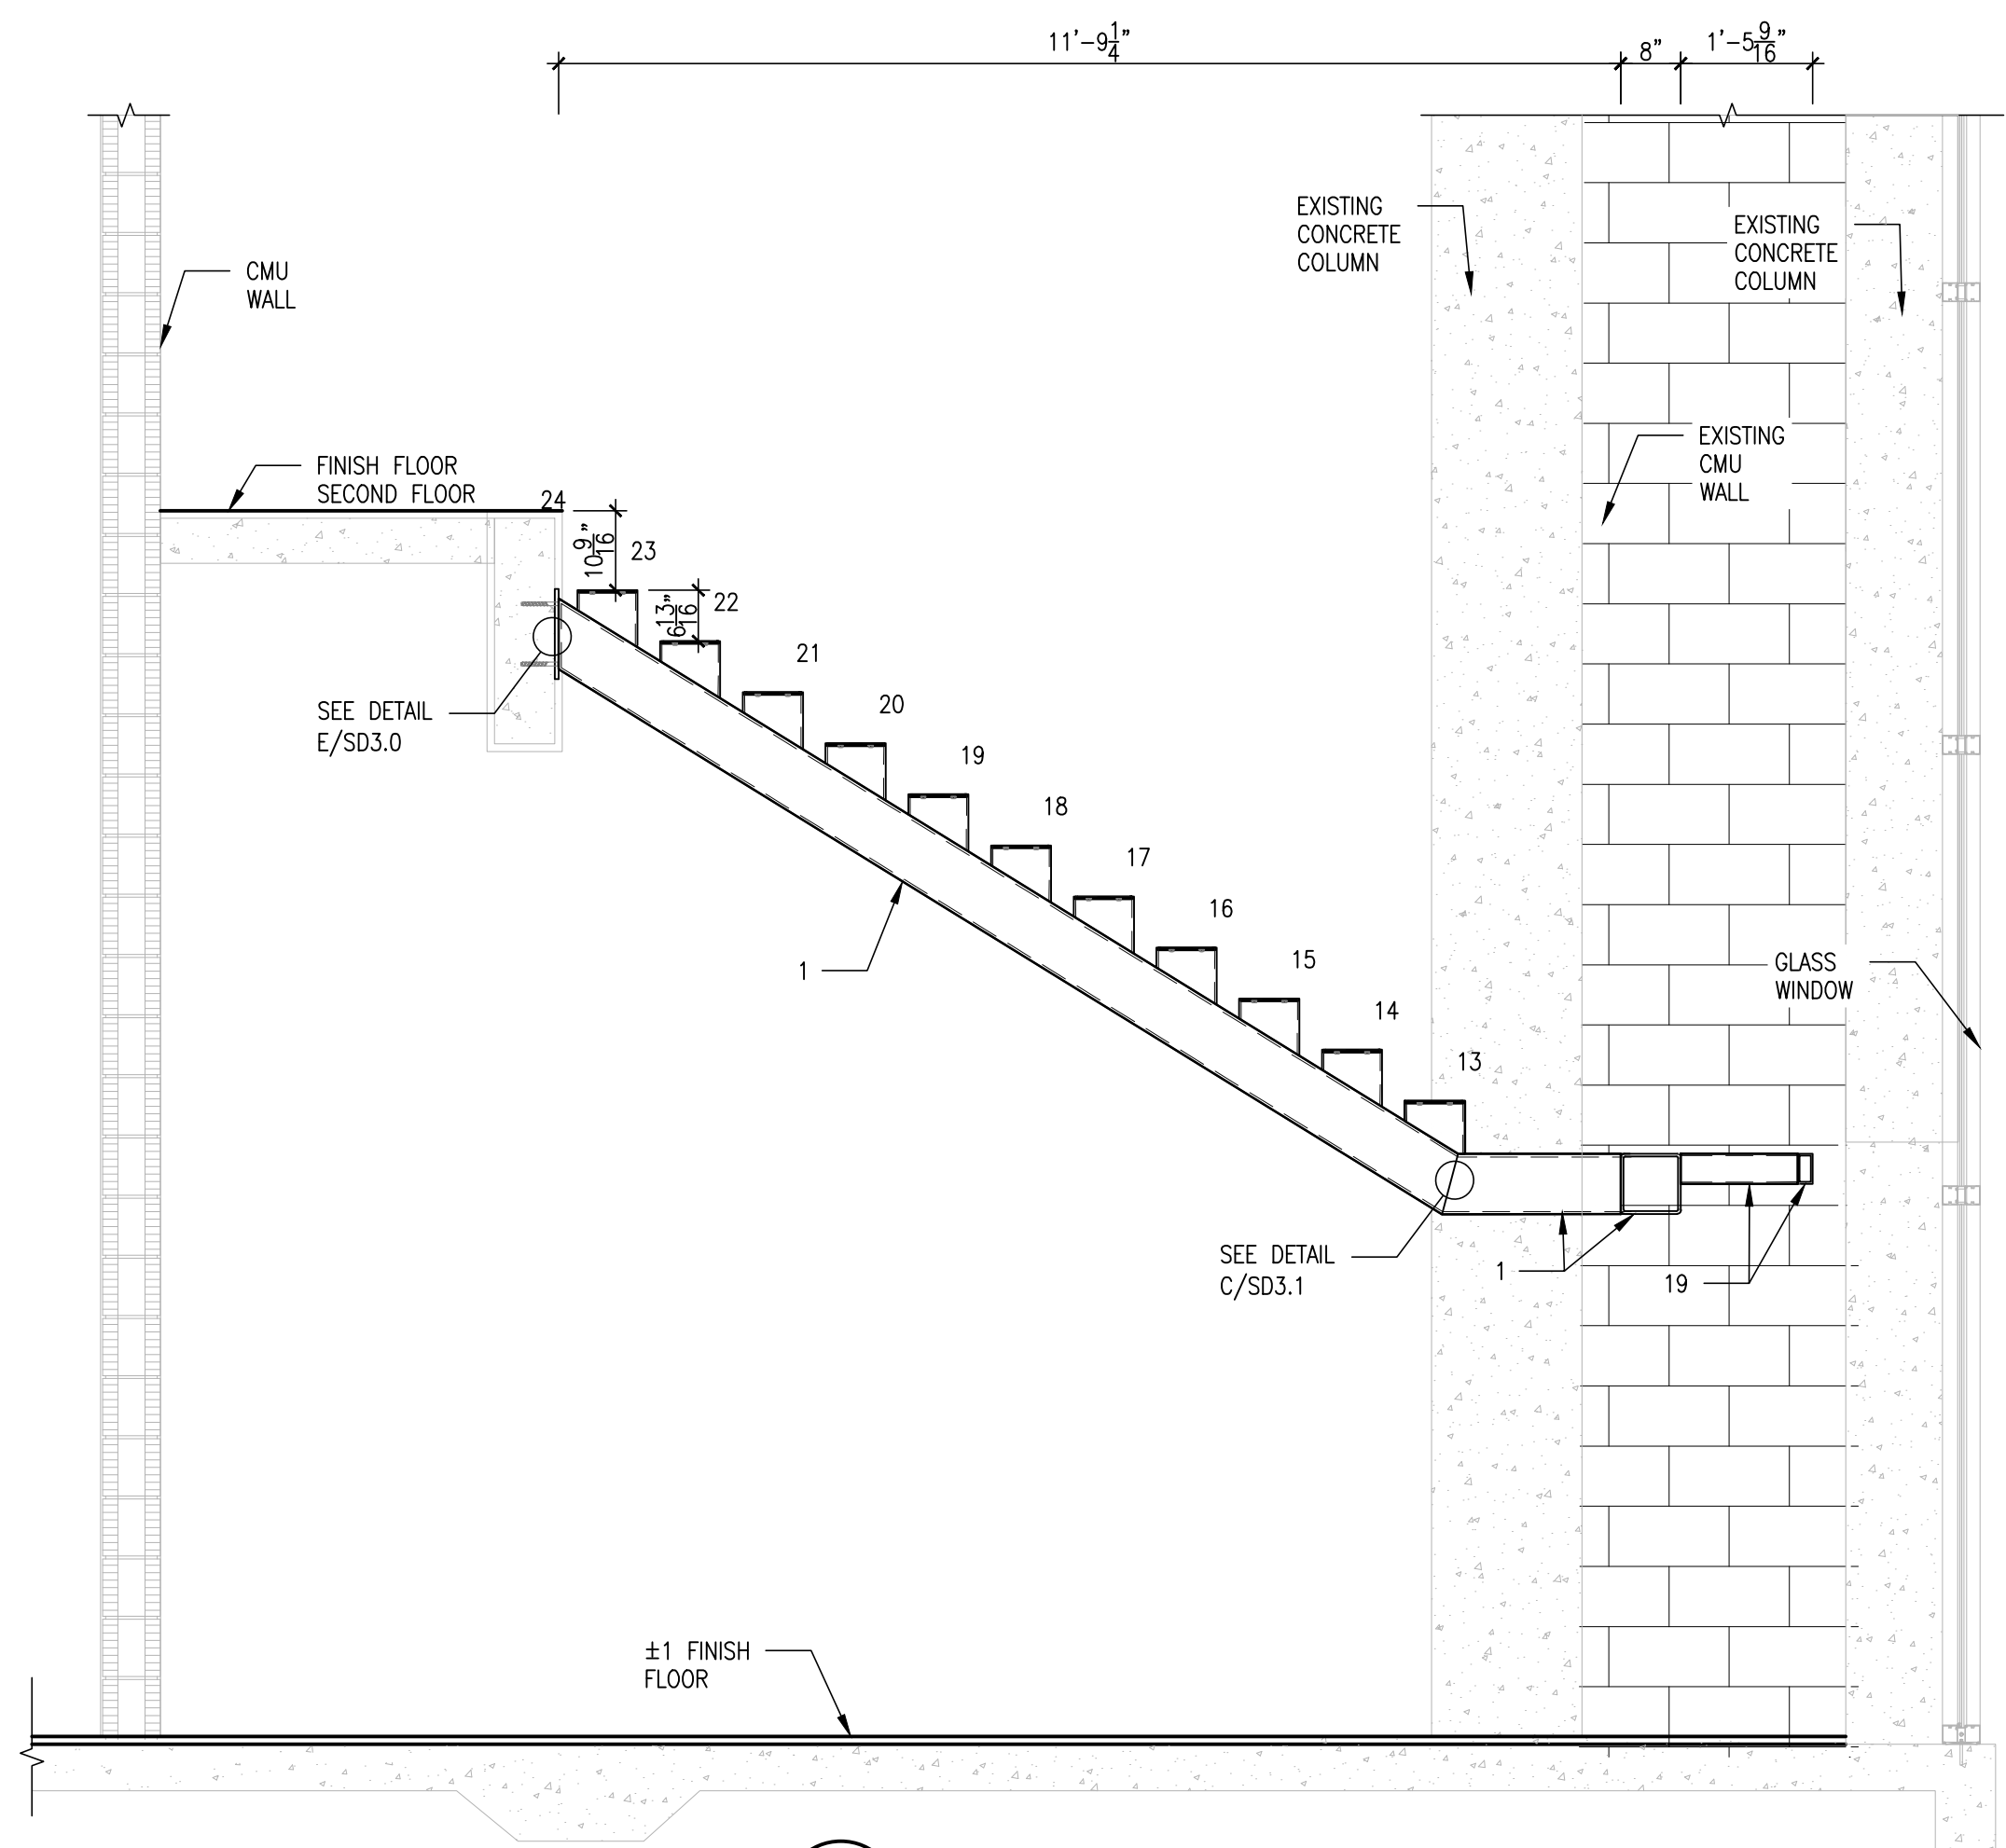

- STAIR LEGEND:
1. STRINGER HSS8x8x $\frac{3}{8}$ ASTM A500 Gr.B
 2. 11"x4"x45" WOOD TREAD BY OTHER.
 3. STEEL TREADS SUPPORT HSS8x8x $\frac{1}{4}$ ASTM A500 GR. B (TYP)
 4. STEEL PLATE $\frac{1}{2}$ "x25"x12" ASTM A36 (TYP.)
 5. STEEL PLATE $\frac{1}{2}$ "x16"x16" ASTM A36 (TYP.)
 6. $\varnothing\frac{5}{8}$ "x6 $\frac{1}{2}$ " KWIK HUS-EZ (KH-EZ) W/5" MIN EMBEDMENT &4" MIN EDGE DIST (TYP)
 7. LANDING 36"x4"x95" WOOD TREAD BY OTHER.
 8. SS30400 $\varnothing$ 2" STANDOFF BY CR-LAURENCE (typ.)
 9. 9/16" LAMINATED TEMPERED GLASS PANEL. SEE GLASS NOTES FOR SPECS (typ)
 10. STEEL PLATE $\frac{1}{2}$ "x9"x1 $\frac{1}{2}$ " WELDED TO TREAD (TYP)
 11. STEEL PLATE $\frac{1}{2}$ "x6"x21" ASTM A36 (TYP.)
 12. SS304 CONTINUOS HANDRAIL 1 $\frac{1}{2}$ "x $\frac{1}{8}$ " (TYP.)
 13. STEEL PLATE $\frac{1}{4}$ "x7 $\frac{1}{2}$ "x7 $\frac{1}{2}$ " ASTM A36 (TYP.)
 14. $\varnothing\frac{3}{8}$ "x THRU BOLT ASTM A307.
 15. STEEL PLATE $\frac{1}{2}$ "x12"x14" ASTM A36 (TYP.)
 16. $\varnothing\frac{3}{8}$ "x3 TAPCON ANCHOR BOLT. FILL C.M.U CELL W/ 3000 PSI GROUT AS PER MIN. SPECS.
 17. SS31600 BRACKET MALIBU SERIES @42" O.C MAX.
 18. $\varnothing\frac{3}{8}$ "x4" HILTI KH-EX SCREW ANCHOR W/3 $\frac{1}{4}$ " EMBEDMENT, 3" MIN. EDGE DIST & 4" SPACING O.C (typ)
 19. STEEL TUBE HSS2x4x $\frac{1}{4}$ A500 Gr.B

- NOTES:
1. FIELD VERIFY ALL DIMENSIONS PRIOR TO FABRICATION.
 2. ALL CONNECTION $\frac{1}{4}$ " FILLET WELD U.N.O ON DETAILS.
 3. FINISH COLOR BY OWNER/CONTRACTOR.



3A ENGINEERING DRAFTING
DESIGNING THE FUTURE
12651 S Dixie Hwy, Suite #322
Pinecrest, FL 33156
Phone: (305) 710-2987
email: 3aengdrafting@gmail.com
COPYRIGHT RESERVED: ALL DESIGNS AND DRAWINGS ARE
EXCLUSIVE PROPERTY OF THE ENGINEER. REPRODUCTION
OR USE FOR ANY PURPOSE OTHER THAN THAT
AUTHORIZED IN WRITTEN BY THE ENGINEER IS PROHIBITED

ALAYM AGUILAR, PE
Lic. No-92154
Alaym Aguilar, Professional Engineer,
State of Florida, License No. 92154.
This item has been digitally signed
and sealed by Alaym Aguilar, PE, on
the date provided on the signature.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies.

PROJECT NAME:	704 SE 7 ST.
TYPE OF PROJECT:	Misc. Shop Drawings
SHEET NAME:	Stair Frame Section 2nd Flight
PROJECT LOCATION:	704 SE 7 St, Fort Lauderdale, FL 33316
CLIENT NAME:	Heylin Gonzalez

REVISIONS	DATE	

MISC. SHOP DRAWING
DRAWN: Y.L
CHECKED: A.A.
SCALE: AS SHOWN
JOB NO: 23-207
DATE: 8/18/2023


SHEET No.:
SD2.4

I

SD2.2

STAIR FRAME SECTION 2ND FLIGHT

SCALE: 1/2"=1'-0"

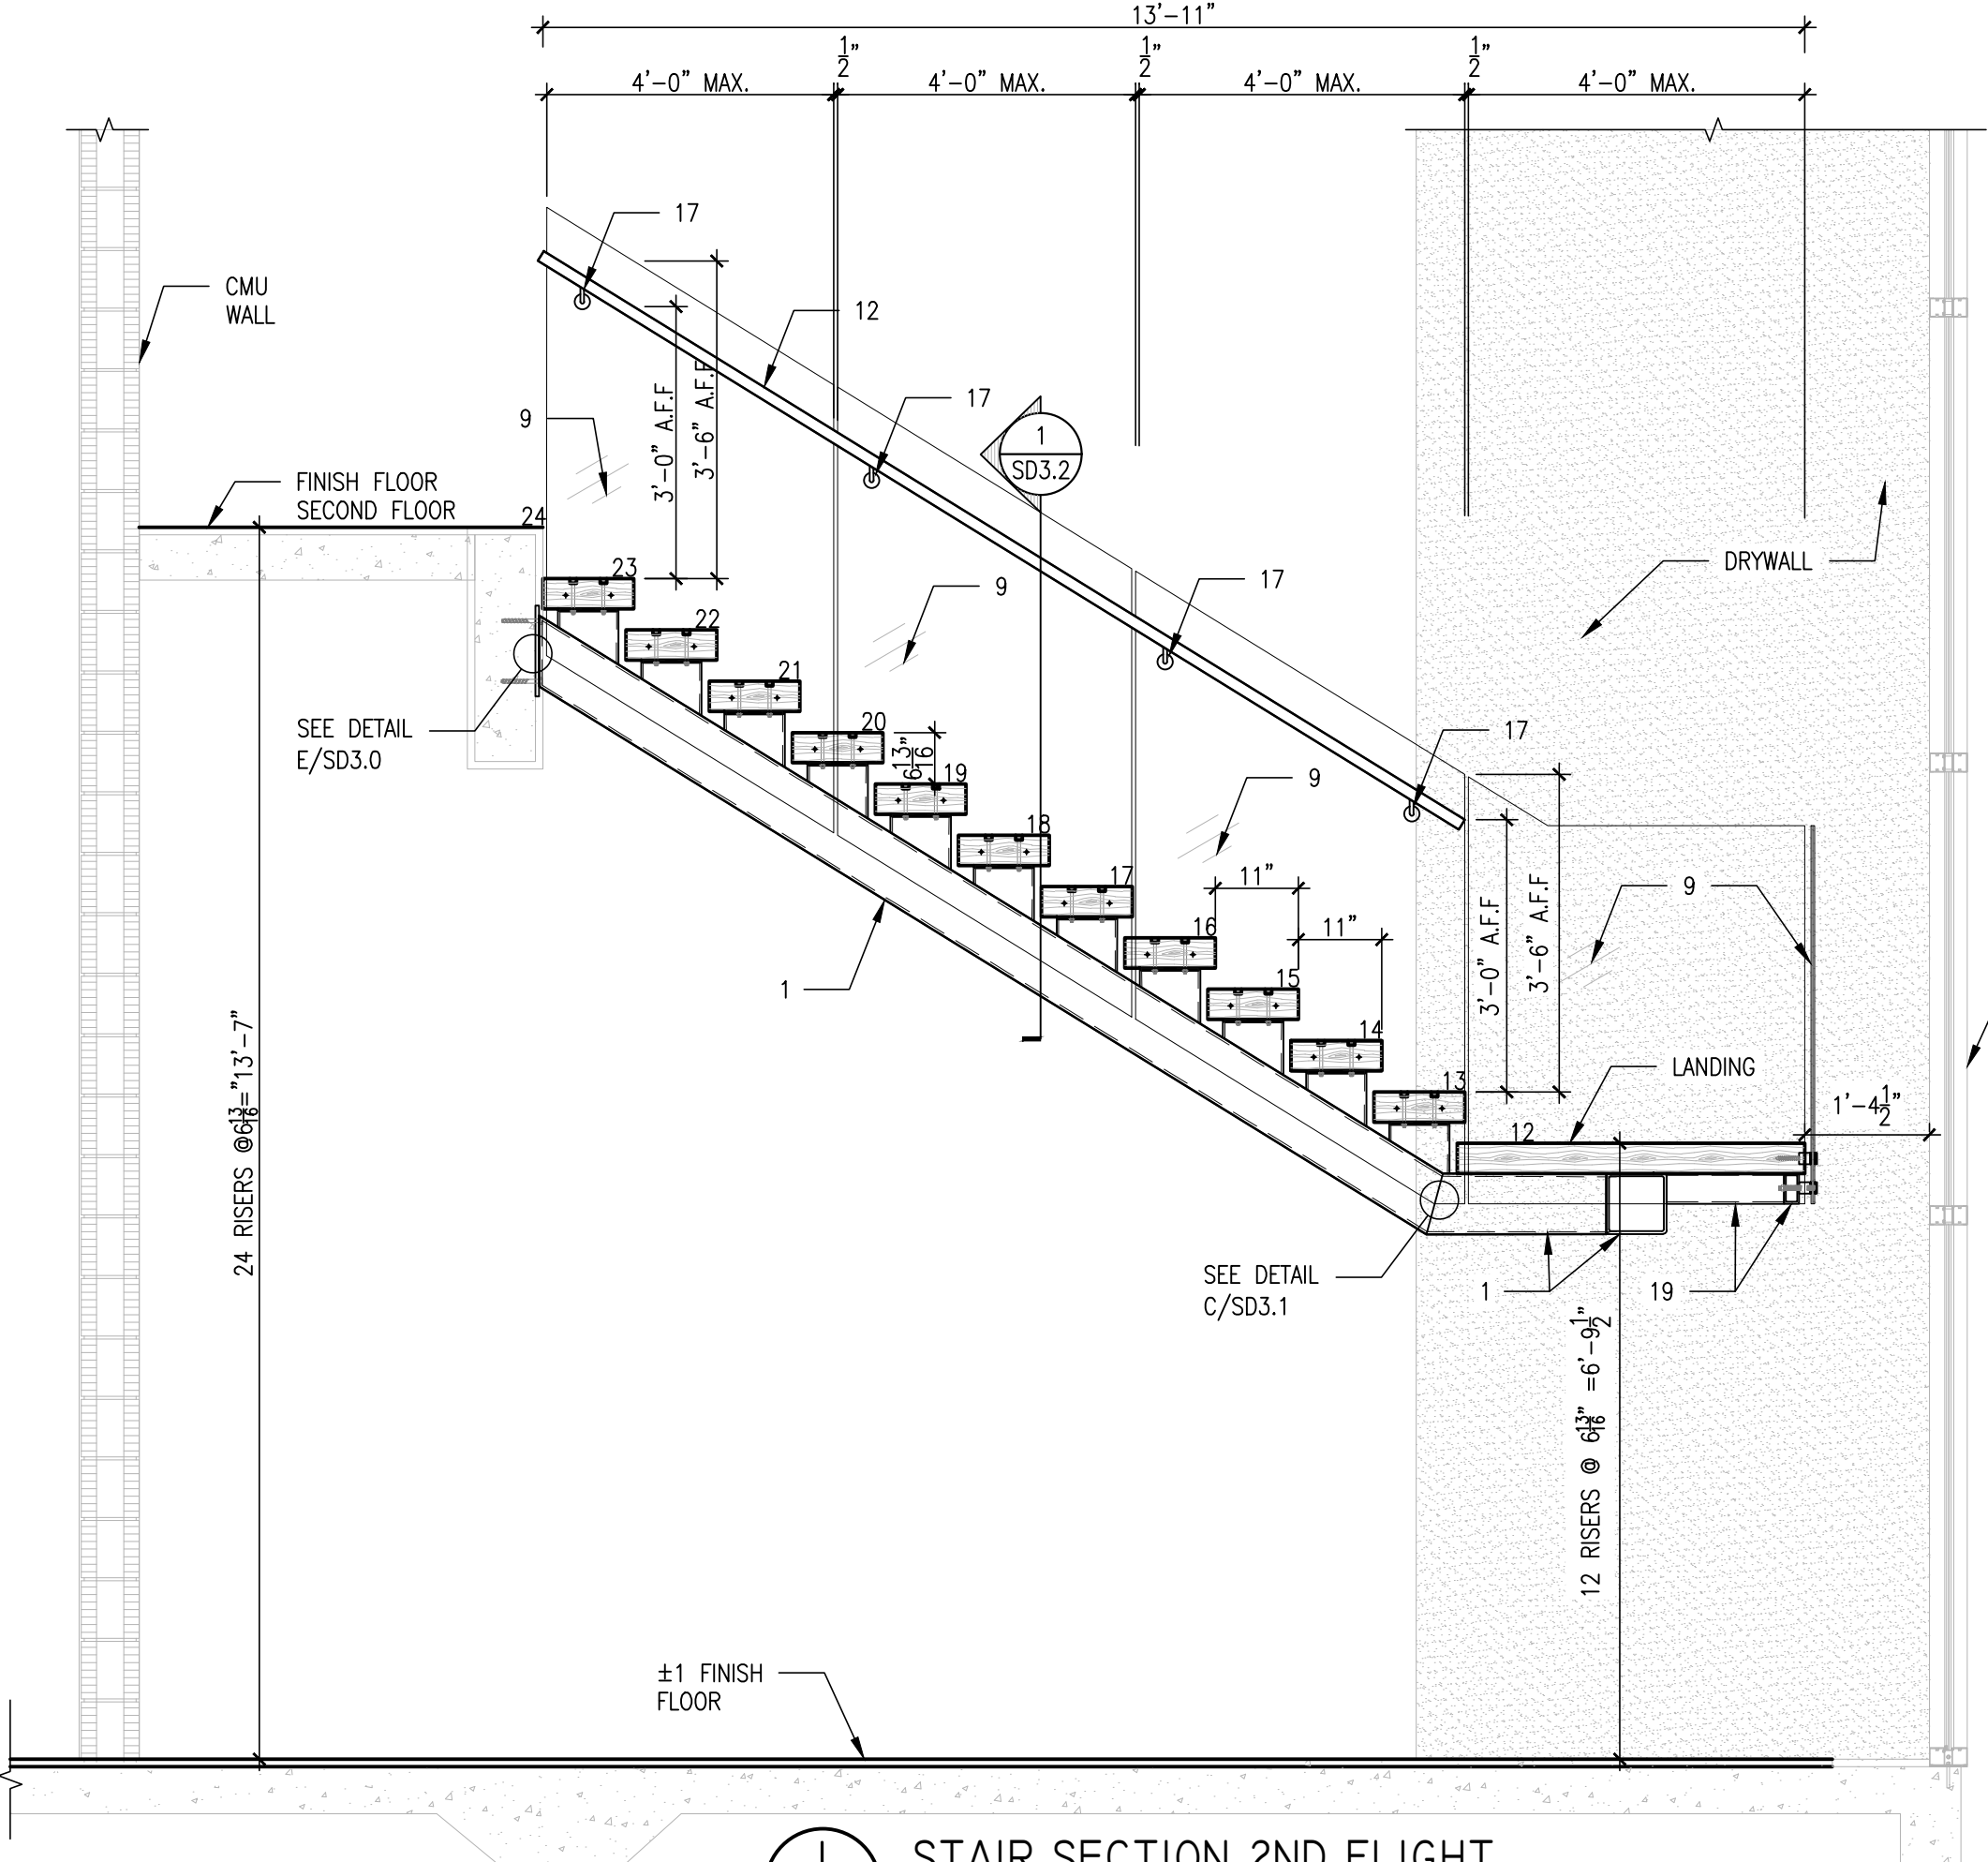

- STAIR LEGEND:**
- 1. STRINGER HSS8x8x $\frac{3}{8}$ ASTM A500 Gr.B
 - 2. 11"x4"x45" WOOD TREAD BY OTHER.
 - 3. STEEL TREADS SUPPORT HSS8x8x $\frac{1}{4}$ ASTM A500 GR. B (TYP)
 - 4. STEEL PLATE $\frac{1}{2}$ "x25"x12" ASTM A36 (TYP.)
 - 5. STEEL PLATE $\frac{1}{2}$ "x16"x16" ASTM A36 (TYP.)
 - 6. $\emptyset\frac{5}{8}$ "x6 $\frac{1}{2}$ " KWIK HUS-EZ (KH-EZ) W/5" MIN EMBEDMENT &4" MIN EDGE DIST (TYP)
 - 7. LANDING 36"x4"x95" WOOD TREAD BY OTHER.
 - 8. SS30400 $\emptyset$ 2" STANDOFF BY CR-LAURENCE (typ.)
 - 9. 9/16" LAMINATED TEMPERED GLASS PANEL. SEE GLASS NOTES FOR SPECS (typ)
 - 10. STEEL PLATE $\frac{1}{2}$ "x9"x1 $\frac{1}{2}$ " WELDED TO TREAD (TYP)
 - 11. STEEL PLATE $\frac{1}{2}$ "x6"x21" ASTM A36 (TYP.)
 - 12. SS304 CONTINUOS HANDRAIL 1 $\frac{1}{2}$ "x $\frac{1}{8}$ " (TYP.)
 - 13. STEEL PLATE $\frac{1}{4}$ "x7 $\frac{1}{2}$ "x7 $\frac{1}{2}$ " ASTM A36 (TYP.)
 - 14. $\emptyset\frac{3}{8}$ "x THRU BOLT ASTM A307.
 - 15. STEEL PLATE $\frac{1}{2}$ "x12"x14" ASTM A36 (TYP.)
 - 16. $\emptyset\frac{3}{8}$ "x3 TAPCON ANCHOR BOLT. FILL C.M.U CELL W/ 3000 PSI GROUT AS PER MIN. SPECS.
 - 17. SS31600 BRACKET MALIBU SERIES @42" O.C MAX.
 - 18. $\emptyset\frac{3}{8}$ "x4" HILTI KH-EX SCREW ANCHOR W/3 $\frac{1}{4}$ " EMBEDMENT, 3" MIN. EDGE DIST & 4" SPACING O.C (typ)
 - 19. STEEL TUBE HSS2x4x $\frac{1}{4}$ A500 Gr.B

- NOTES:**
- 1. FIELD VERIFY ALL DIMENSIONS PRIOR TO FABRICATION.
 - 2. ALL CONNECTION $\frac{1}{4}$ " FILLET WELD U.N.O ON DETAILS.
 - 3. FINISH COLOR BY OWNER/CONTRACTOR.

3A ENGINEERING DRAFTING
DESIGNING THE FUTURE
12651 S Dixie Hwy, Suite #322
Pinecrest, FL 33156
Phone: (305) 710-2987
email: 3aengdrafting@gmail.com
COPYRIGHT RESERVED: ALL DESIGNS AND DRAWINGS ARE
EXCLUSIVE PROPERTY OF THE ENGINEER. REPRODUCTION
OR USE FOR ANY PURPOSE OTHER THAN THAT
AUTHORIZED IN WRITTEN BY THE ENGINEER IS PROHIBITED


ALAYM AGUILAR, PE
Lic. No-92154
Alaym Aguilar, Professional Engineer,
State of Florida, License No. 92154.
This item has been digitally signed
and sealed by Alaym Aguilar, PE, on
the date provided on the signature.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies.

PROJECT NAME:	704 SE 7 ST.
TYPE OF PROJECT:	Misc. Shop Drawings
SHEET NAME:	Stair Section 2nd Flight
PROJECT LOCATION:	704 SE 7 St, Fort Lauderdale, FL 33316
CLIENT NAME:	Heylin Gonzalez

REVISIONS	DATE	

MISC. SHOP DRAWING
DRAWN: Y.L
CHECKED: A.A.
SCALE: AS SHOWN
JOB NO: 23-207
DATE: 8/18/2023

SHEET No.:
SD2.5

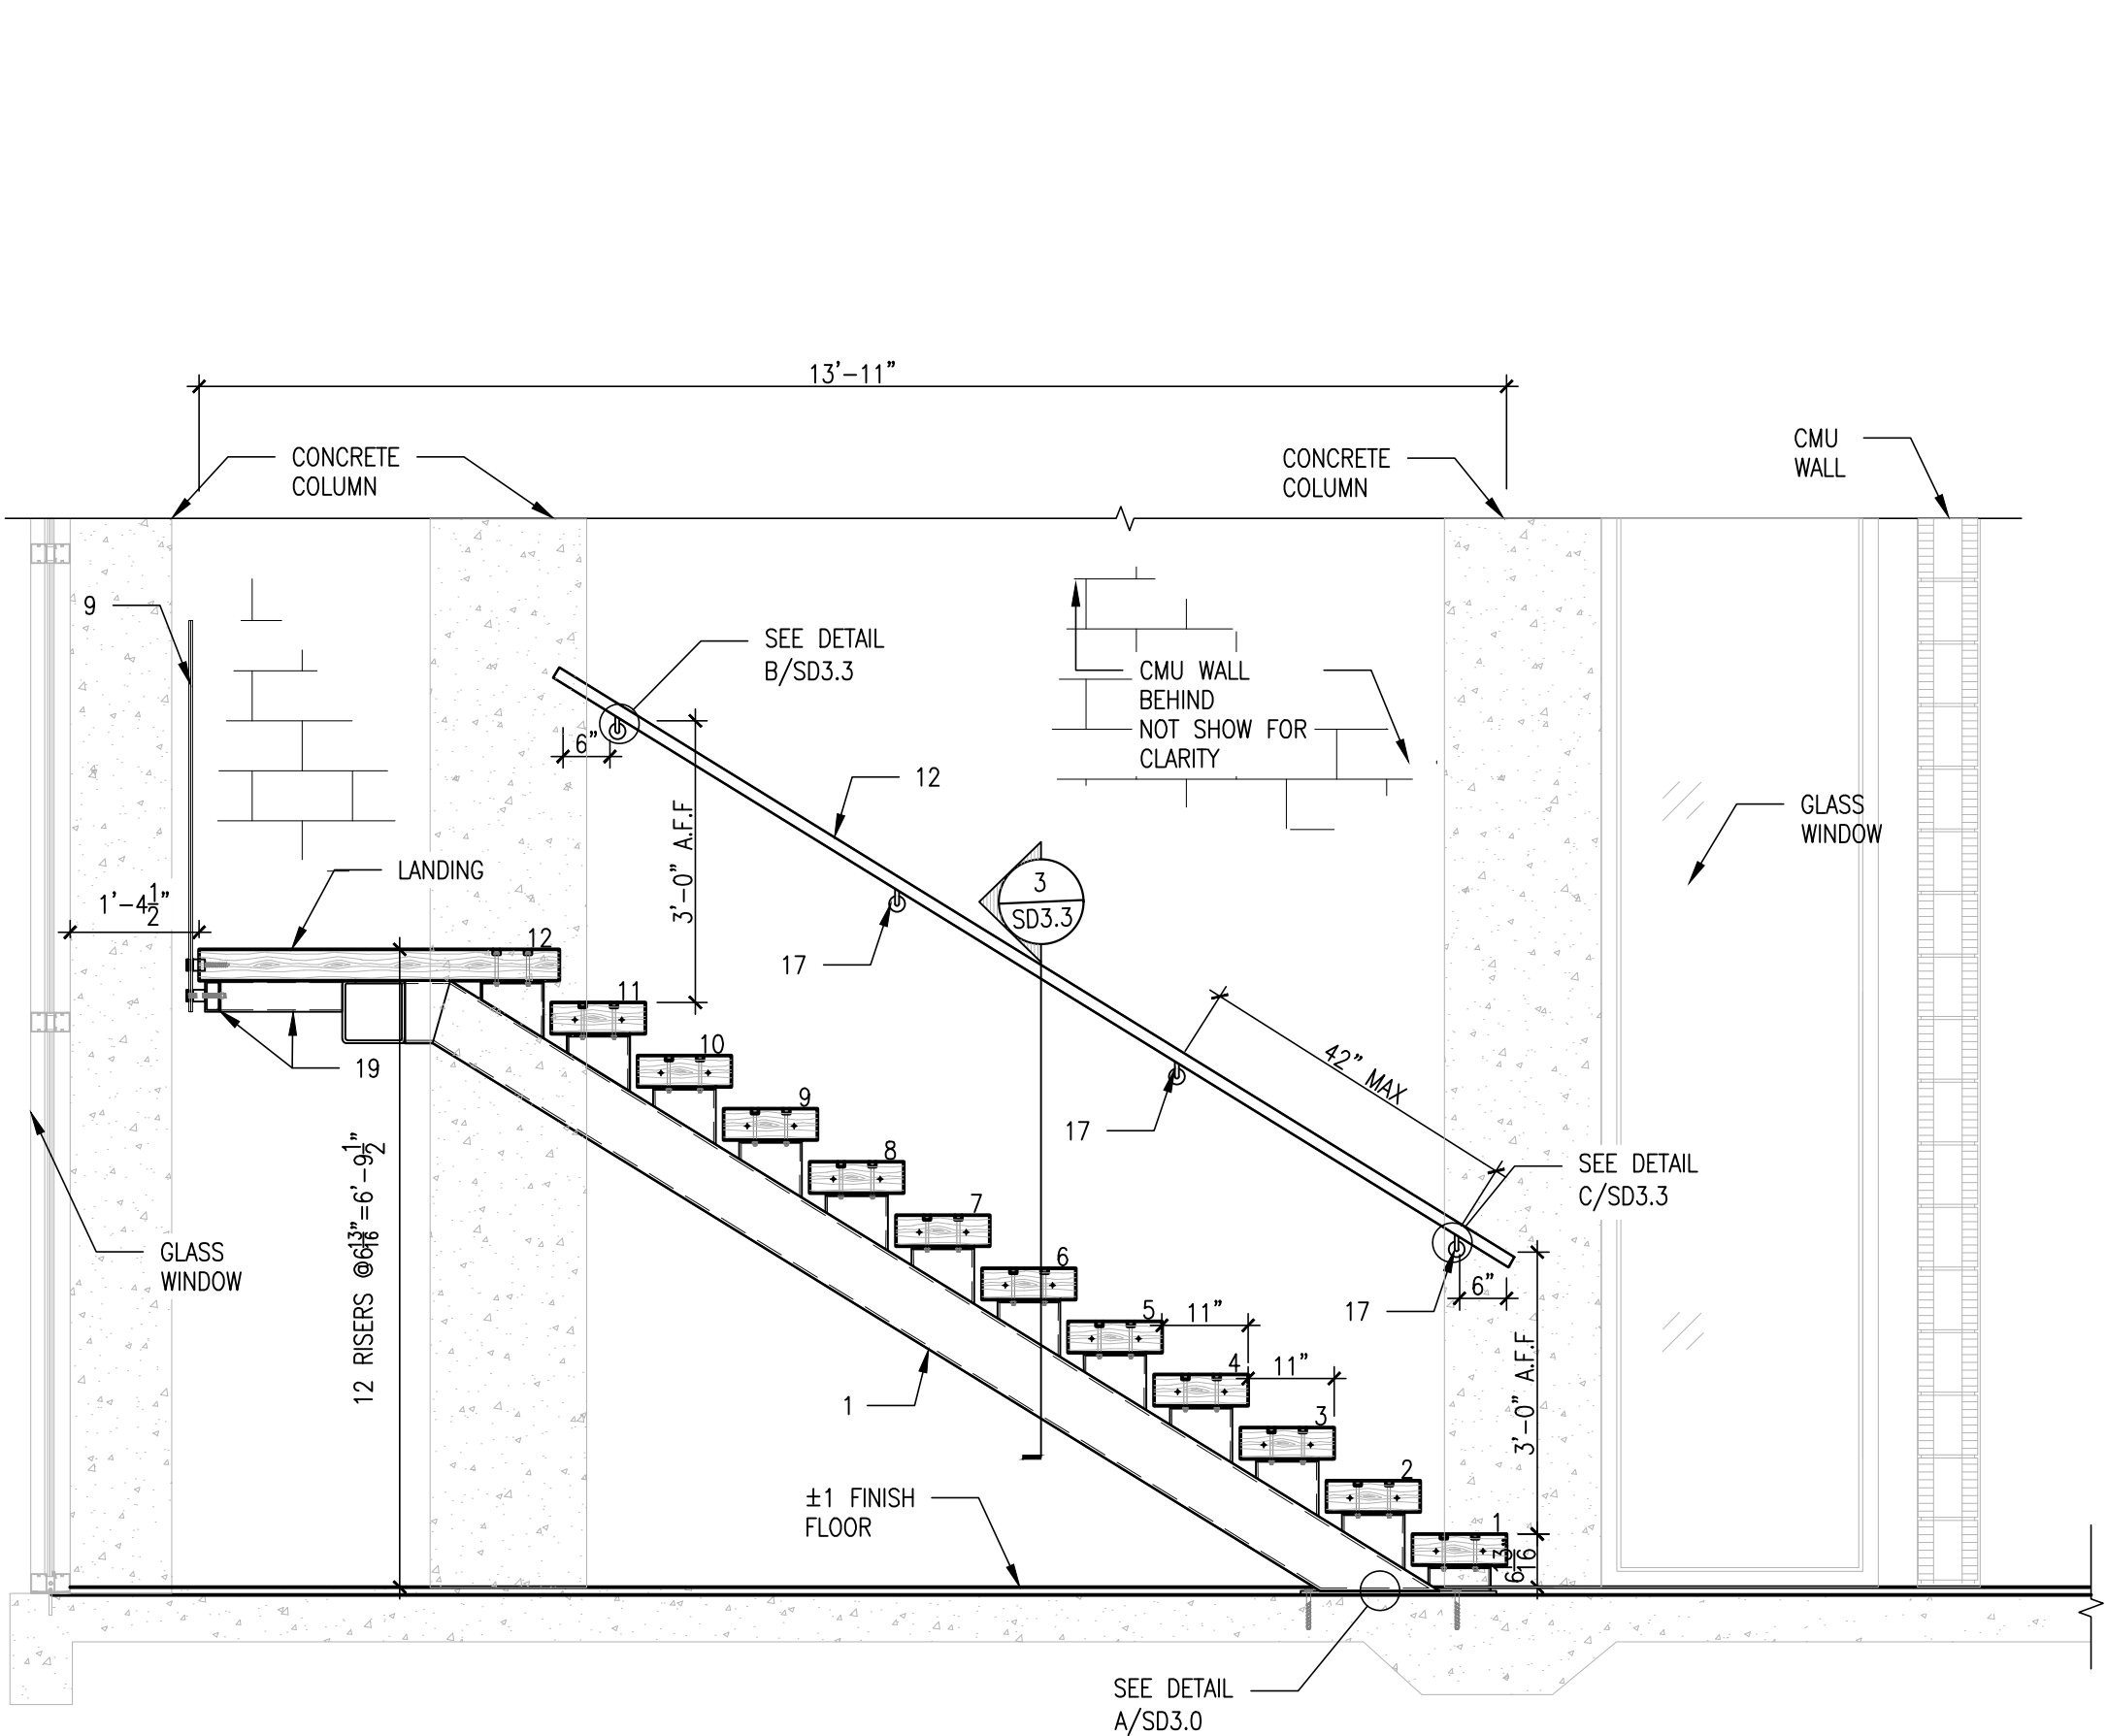

- STAIR LEGEND:**
1. STRINGER HSS8x8x3/8 ASTM A500 Gr.B
 2. 11"x4"x45" WOOD TREAD BY OTHER.
 3. STEEL TREADS SUPPORT HSS8x8x1/4 ASTM A500 GR. B (TYP)
 4. STEEL PLATE 1/2"x25"x12" ASTM A36 (TYP.)
 5. STEEL PLATE 1/2"x16"x16" ASTM A36 (TYP.)
 6. 3/8"x6 1/2" KWIK HUS-EZ (KH-EZ) W/5" MIN EMBEDMENT & 4" MIN EDGE DIST (TYP)
 7. LANDING 36"x4"x95" WOOD TREAD BY OTHER.
 8. SS30400 2" STANDOFF BY CR-LAURENCE (typ.)
 9. 9/16" LAMINATED TEMPERED GLASS PANEL. SEE GLASS NOTES FOR SPECS (typ)
 10. STEEL PLATE 1/2"x9"x1 1/2" WELDED TO TREAD (TYP)
 11. STEEL PLATE 1/2"x6"x21" ASTM A36 (TYP.)
 12. SS304 CONTINUOS HANDRAIL 1 1/2"x3/8" (TYP.)
 13. STEEL PLATE 1/4"x7 1/2"x7 1/2" ASTM A36 (TYP.)
 14. 3/8"x THRU BOLT ASTM A307.
 15. STEEL PLATE 1/2"x12"x14" ASTM A36 (TYP.)
 16. 3/8"x3 TAPCON ANCHOR BOLT. FILL C.M.U. CELL W/ 3000 PSI GROUT AS PER MIN. SPECS.
 17. SS31600 BRACKET MALIBU SERIES @42" O.C MAX.
 18. 3/8"x4" HILTI KH-EX SCREW ANCHOR W/3/4" EMBEDMENT, 3" MIN. EDGE DIST & 4" SPACING O.C (typ)
 19. STEEL TUBE HSS2x4x1/4 A500 Gr.B
- NOTES:**
1. FIELD VERIFY ALL DIMENSIONS PRIOR TO FABRICATION.
 2. ALL CONNECTION 1/4" FILLET WELD U.N.O ON DETAILS.
 3. FINISH COLOR BY OWNER/CONTRACTOR.

3A ENGINEERING DRAFTING
DESIGNING THE FUTURE
12651 S Dixie Hwy, Suite #322
Pinecrest, FL 33156
Phone: (305) 710-2987
email: 3aengdrafting@gmail.com
COPYRIGHT RESERVED: ALL DESIGNS AND DRAWINGS ARE EXCLUSIVE PROPERTY OF THE ENGINEER. REPRODUCTION OR USE FOR ANY PURPOSE OTHER THAN THAT AUTHORIZED IN WRITTEN BY THE ENGINEER IS PROHIBITED

ALAYM AGUILAR, PE
Lic. No-92154
Alaym Aguilar, Professional Engineer,
State of Florida, License No. 92154.
This item has been digitally signed
and sealed by Alaym Aguilar, PE, on
the date provided on the signature.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies.


PROJECT NAME:	704 SE 7 ST.
TYPE OF PROJECT:	Misc. Shop Drawings
SHEET NAME:	Stair Elevation
PROJECT LOCATION:	704 SE 7 St, Fort Lauderdale, FL 33316
CLIENT NAME:	Heylin Gonzalez

REVISIONS	DATE	


MISC. SHOP DRAWING
DRAWN: Y.L
CHECKED: A.A.
SCALE: AS SHOWN
JOB NO: 23-207
DATE: 8/18/2023

SHEET No.:
SD2.6


A STAIR ELEVATION
SD2.6 SCALE: 1/2"=1'-0"

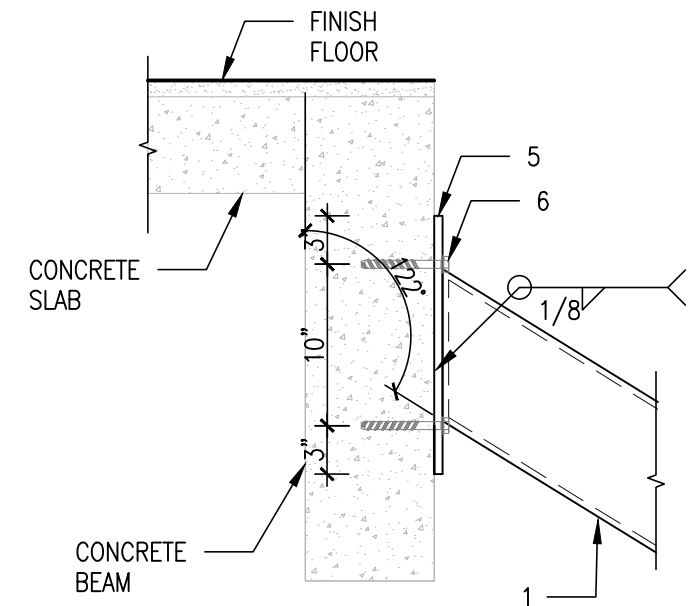


D TOP CONN. DETAIL
SD3.0 SCALE: 1"=1'-0"

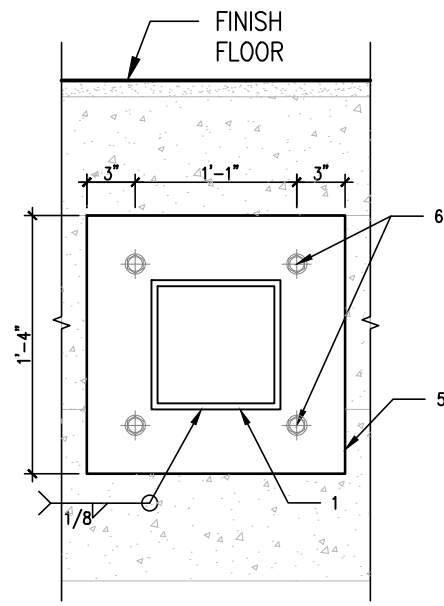


FRONT VIEW

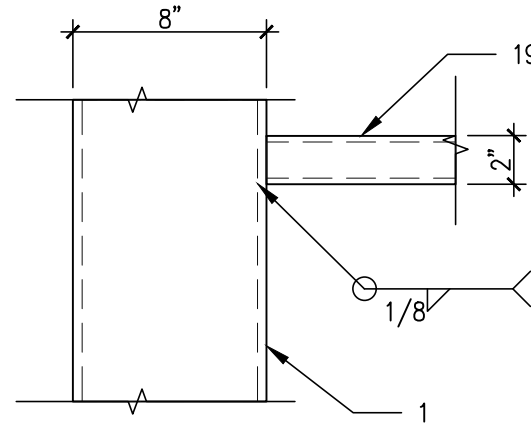


E CONN. DETAIL
SD3.0 SCALE: 1 1/2"=1'-0"

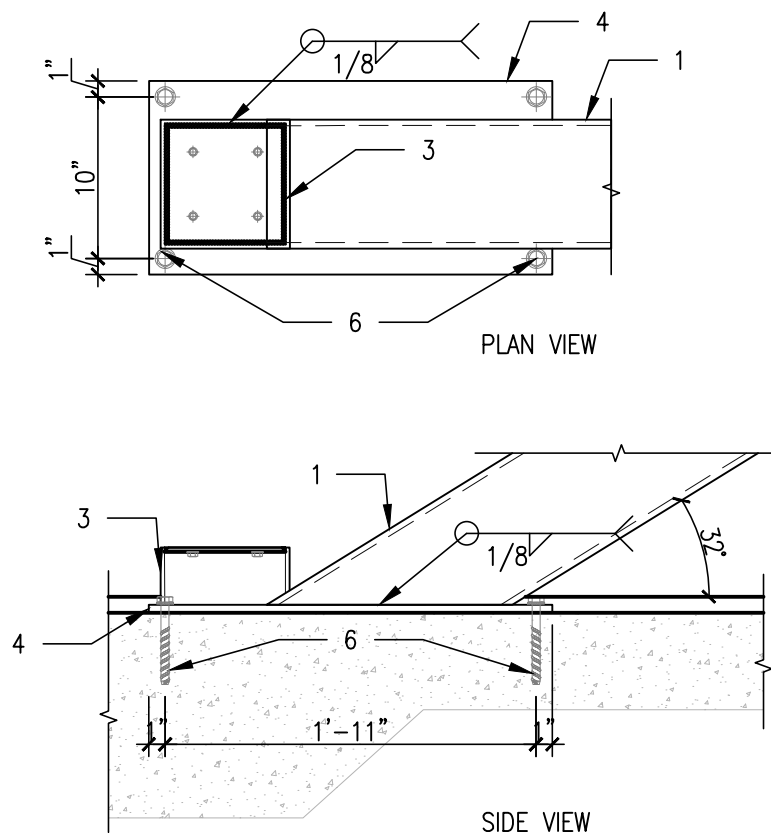


A BOTTOM. CONN. DETAIL
SD3.0 SCALE: 1"=1'-0"

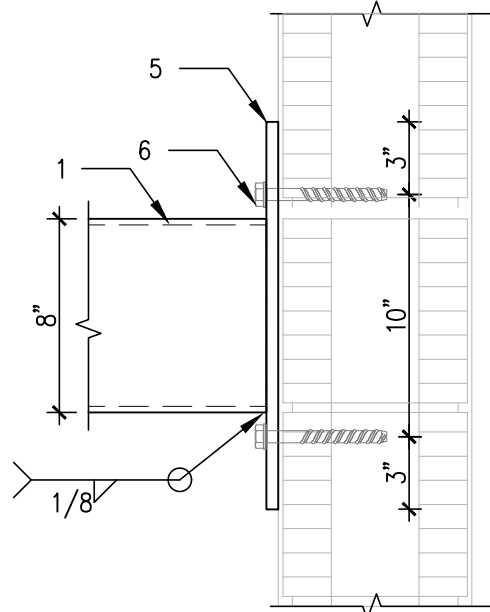

SIDE VIEW

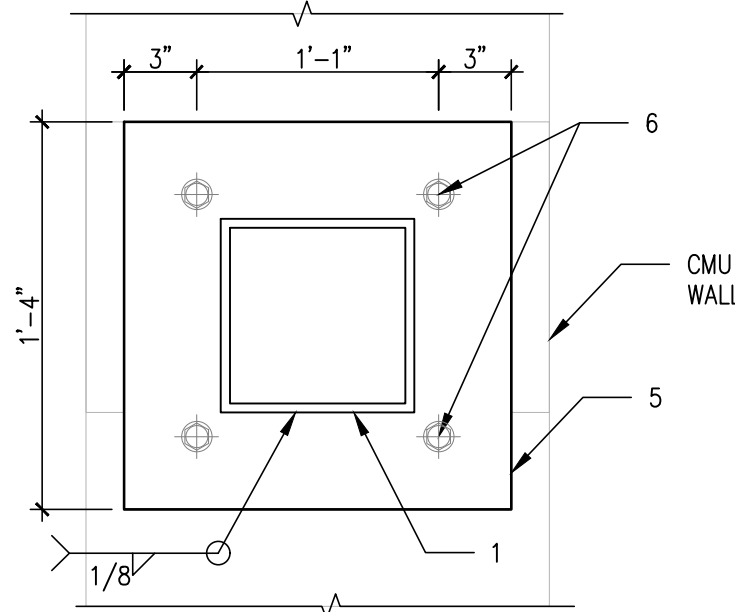

FRONT VIEW

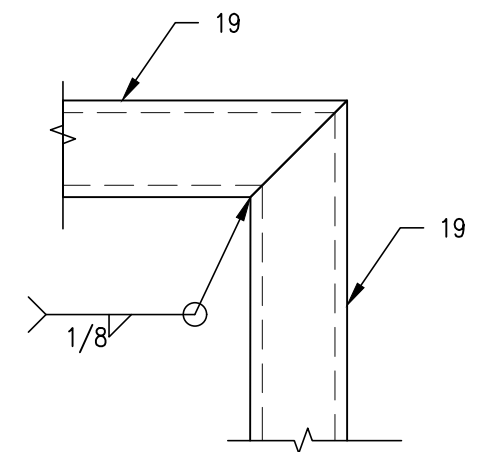


C CONN. DETAIL
SD3.0 SCALE: 3"=1'-0"

STAIR LEGEND:

1. STRINGER HSS8x8x $\frac{3}{8}$ ASTM A500 Gr.B
2. 11"x4"x45" WOOD TREAD BY OTHER.
3. STEEL TREADS SUPPORT HSS8x8x $\frac{1}{4}$ ASTM A500 GR. B (TYP)
4. STEEL PLATE $\frac{1}{2}$ "x25"x12" ASTM A36 (TYP.)
5. STEEL PLATE $\frac{1}{2}$ "x16"x16" ASTM A36 (TYP.)
6. $\emptyset\frac{5}{8}$ "x6 $\frac{1}{2}$ " KWIK HUS-EZ (KH-EZ) W/5" MIN EMBEDMENT &4" MIN EDGE DIST (TYP)
7. LANDING 36"x4"x95" WOOD TREAD BY OTHER.
8. SS30400 $\emptyset$ 2" STANDOFF BY CR-LAURENCE (typ.)
9. 9/16" LAMINATED TEMPERED GLASS PANEL. SEE GLASS NOTES FOR SPECS (typ)
10. STEEL PLATE $\frac{1}{2}$ "x9"x1 $\frac{1}{2}$ " WELDED TO TREAD (TYP)
11. STEEL PLATE $\frac{1}{2}$ "x6"x21" ASTM A36 (TYP.)
12. SS304 CONTINUOUS HANDRAIL 1 $\frac{1}{2}$ "x $\frac{1}{8}$ " (TYP.)
13. STEEL PLATE $\frac{1}{4}$ "x7 $\frac{1}{2}$ "x7 $\frac{1}{2}$ " ASTM A36 (TYP.)
14. $\emptyset\frac{3}{8}$ "x THRU BOLT ASTM A307.
15. STEEL PLATE $\frac{1}{2}$ "x12"x14" ASTM A36 (TYP.)
16. $\emptyset\frac{3}{8}$ "x3 TAPCON ANCHOR BOLT. FILL C.M.U CELL W/ 3000 PSI GROUT AS PER MIN. SPECS.
17. SS31600 BRACKET MALIBU SERIES @42" O.C MAX.
18. $\emptyset\frac{3}{8}$ "x4" HILTI KH-EX SCREW ANCHOR W/3 $\frac{1}{4}$ " EMBEDMENT, 3" MIN. EDGE DIST & 4" SPACING O.C (typ)
19. STEEL TUBE HSS2x4x $\frac{1}{4}$ A500 Gr.B

NOTES:

1. FIELD VERIFY ALL DIMENSIONS PRIOR TO FABRICATION.
2. ALL CONNECTION $\frac{1}{4}$ " FILLET WELD U.N.O ON DETAILS.
3. FINISH COLOR BY OWNER/CONTRACTOR.

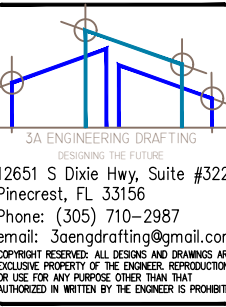

ALAYM AGUILAR, PE
Lic. No-92154
Alaym Aguilar, Professional Engineer,
State of Florida, License No. 92154.
This item has been digitally signed
and sealed by Alaym Aguilar, PE, on
the date provided on the signature.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies.


PROJECT NAME: 704 SE 7 ST.
TYPE OF PROJECT: Misc. Shop Drawings
SHEET NAME: Conn. Details
PROJECT LOCATION: 704 SE 7 St. Fort Lauderdale, FL 33316
CLIENT NAME: Heylin Gonzalez

REVISIONS	DATE	


MISC. SHOP DRAWING
DRAWN: Y.L.
CHECKED: A.A.
SCALE: AS SHOWN
JOB NO: 23-207
DATE: 8/18/2023

SHEET No.:


SD3.0

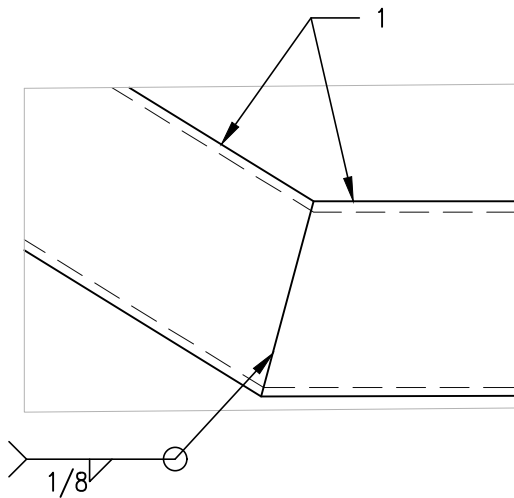



C TREAD DETAIL
SD3.1 SCALE: 1 1/2"=1'-0"

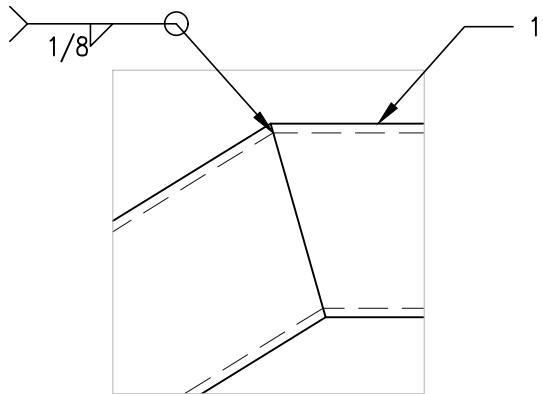

D TREAD DETAIL
SD3.1 SCALE: 1 1/2"=1'-0"

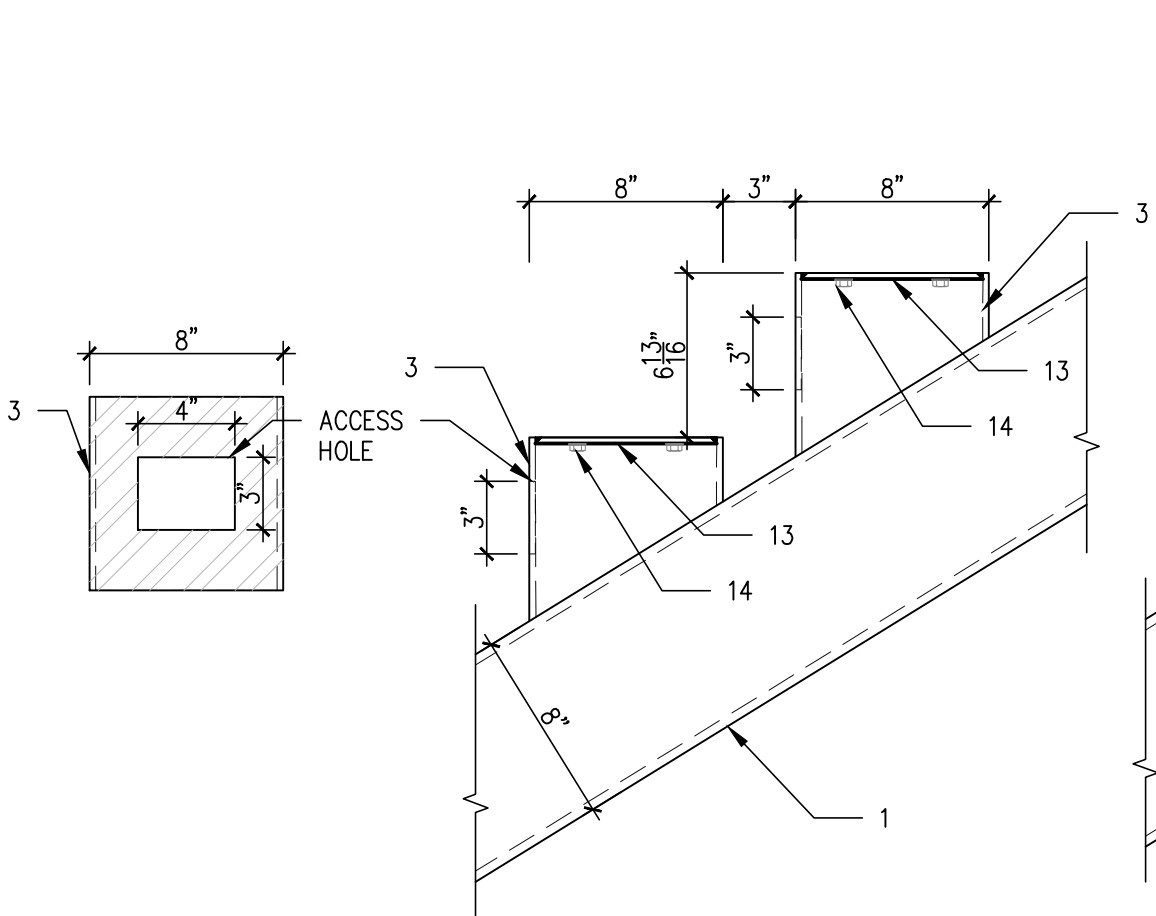

A TREAD DETAIL
SD3.1 SCALE: 1 1/2"=1'-0"

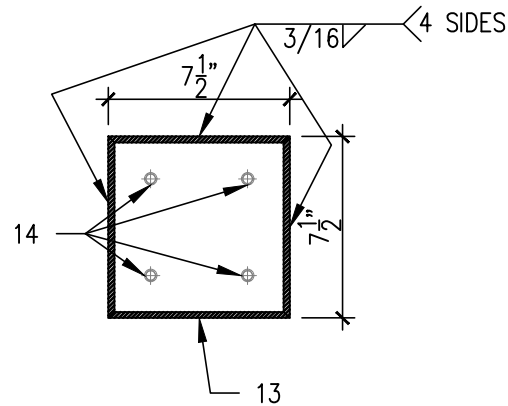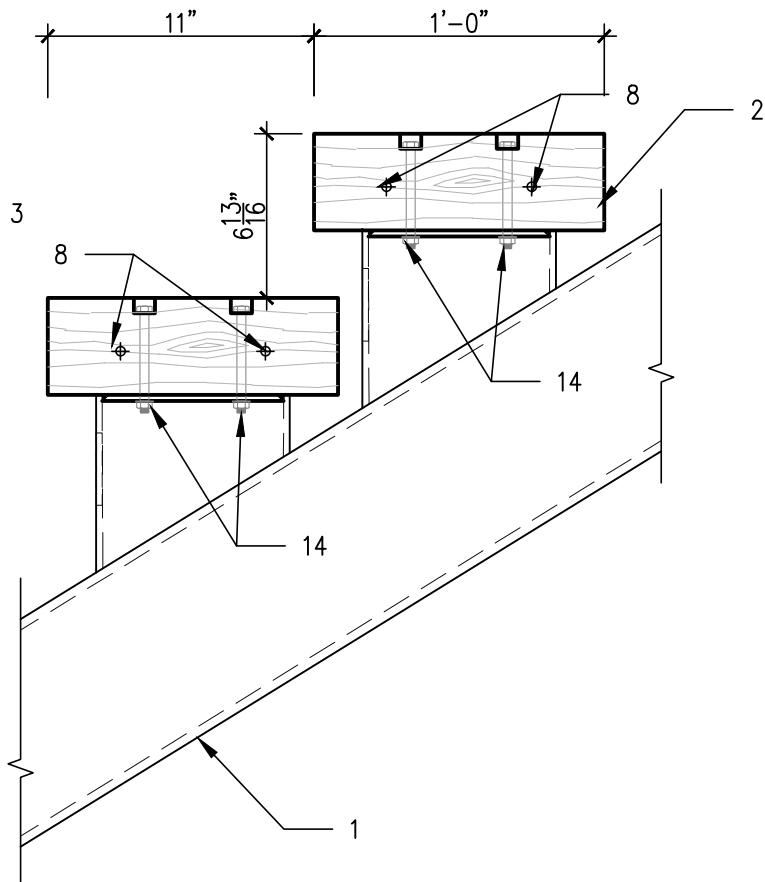


B SUPPORT DETAIL
SD3.1 SCALE: 1 1/2"=1'-0"

STAIR LEGEND:

1. STRINGER HSS8x8x $\frac{3}{8}$ ASTM A500 Gr.B
2. 11"x4"x45" WOOD TREAD BY OTHER.
3. STEEL TREADS SUPPORT HSS8x8x $\frac{1}{4}$ ASTM A500 GR. B (TYP)
4. STEEL PLATE $\frac{1}{2}$ "x25"x12" ASTM A36 (TYP.)
5. STEEL PLATE $\frac{1}{2}$ "x16"x16" ASTM A36 (TYP.)
6. $\varnothing\frac{5}{8}$ "x6 $\frac{1}{2}$ " KWIK HUS-EZ (KH-EZ) W/5" MIN EMBEDMENT &4" MIN EDGE DIST (TYP)
7. LANDING 36"x4"x95" WOOD TREAD BY OTHER.
8. SS30400 $\varnothing$ 2" STANDOFF BY CR-LAURENCE (typ.)
9. 9/16" LAMINATED TEMPERED GLASS PANEL. SEE GLASS NOTES FOR SPECS (typ)
10. STEEL PLATE $\frac{1}{2}$ "x9"x1 $\frac{1}{2}$ " WELDED TO TREAD (TYP)
11. STEEL PLATE $\frac{1}{2}$ "x6"x21" ASTM A36 (TYP.)
12. SS304 CONTINUOS HANDRAIL 1 $\frac{1}{2}$ "x $\frac{1}{8}$ " (TYP.)
13. STEEL PLATE $\frac{1}{4}$ "x7 $\frac{1}{2}$ "x7 $\frac{1}{2}$ " ASTM A36 (TYP.)
14. $\varnothing\frac{3}{8}$ "x THRU BOLT ASTM A307.
15. STEEL PLATE $\frac{1}{2}$ "x12"x14" ASTM A36 (TYP.)
16. $\varnothing\frac{3}{8}$ "x3 TAPCON ANCHOR BOLT. FILL C.M.U CELL W/ 3000 PSI GROUT AS PER MIN. SPECS.
17. SS31600 BRACKET MALIBU SERIES @42" O.C MAX.
18. $\varnothing\frac{3}{8}$ "x4" HILTI KH-EX SCREW ANCHOR W/3 $\frac{1}{4}$ " EMBEDMENT, 3" MIN. EDGE DIST & 4" SPACING O.C (typ)
19. STEEL TUBE HSS2x4x $\frac{1}{4}$ A500 Gr.B

NOTES:

1. FIELD VERIFY ALL DIMENSIONS PRIOR TO FABRICATION.
2. ALL CONNECTION $\frac{1}{4}$ " FILLET WELD U.N.O ON DETAILS.
3. FINISH COLOR BY OWNER/CONTRACTOR.

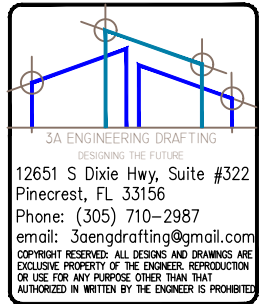

ALAYM AGUILAR, PE
Lic. No-92154
Alaym Aguilar, Professional Engineer,
State of Florida, License No. 92154.
This item has been digitally signed
and sealed by Alaym Aguilar, PE, on
the date provided on the signature.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies.

PROJECT NAME:	704 SE 7 ST.
TYPE OF PROJECT:	Misc. Shop Drawings
SHEET NAME:	Conn. Details
PROJECT LOCATION:	704 SE 7 St, Fort Lauderdale, FL 33316
CLIENT NAME:	Heylin Gonzalez

REVISIONS	DATE	

MISC. SHOP DRAWING
DRAWN: Y.L
CHECKED: A.A.
SCALE: AS SHOWN
JOB NO: 23-207
DATE: 8/18/2023

SHEET No.:
SD3.1


16. $\varnothing\frac{3}{8}$ "x3 TAPCON ANCHOR BOLT. FILL C.M.U CELL W/ 3000 PSI GROUT AS PER MIN. SPECS.
17. SS31600 BRACKET MALIBU SERIES @42" O.C MAX.
18. $\varnothing\frac{3}{8}$ "x4" HILTI KH-EX SCREW ANCHOR W/3 $\frac{1}{4}$ " EMBEDMENT, 3" MIN. EDGE DIST & 4" SPACING O.C (typ)
19. STEEL TUBE HSS2x4x $\frac{1}{4}$ A500 Gr.B

NOTES:

1. FIELD VERIFY ALL DIMENSIONS PRIOR TO FABRICATION.
2. ALL CONNECTION $\frac{1}{4}$ " FILLET WELD U.N.O ON DETAILS.
3. FINISH COLOR BY OWNER/CONTRACTOR.

STAIR LEGEND:


1. STRINGER HSS8x8x $\frac{3}{8}$ ASTM A500 Gr.B
2. 11"x4"x45" WOOD TREAD BY OTHER.
3. STEEL TREADS SUPPORT HSS8x8x $\frac{1}{4}$ ASTM A500 GR. B (TYP)
4. STEEL PLATE $\frac{1}{2}$ "x25"x12" ASTM A36 (TYP.)
5. STEEL PLATE $\frac{1}{2}$ "x16"x16" ASTM A36 (TYP.)
6. $\varnothing\frac{5}{8}$ "x6 $\frac{1}{2}$ " KWIK HUS-EZ (KH-EZ) W/5" MIN EMBEDMENT &4" MIN EDGE DIST (TYP)
7. LANDING 36"x4"x95" WOOD TREAD BY OTHER.
8. SS30400 $\varnothing$ 2" STANDOFF BY CR-LAURENCE (typ.)
9. 9/16" LAMINATED TEMPERED GLASS PANEL. SEE GLASS NOTES FOR SPECS (typ)
10. STEEL PLATE $\frac{1}{2}$ "x9"x1 $\frac{1}{2}$ " WELDED TO TREAD (TYP)
11. STEEL PLATE $\frac{1}{2}$ "x6"x21" ASTM A36 (TYP.)
12. SS304 CONTINUOS HANDRAIL 1 $\frac{1}{2}$ "x $\frac{3}{8}$ " (TYP.)
13. STEEL PLATE $\frac{1}{4}$ "x7 $\frac{1}{2}$ "x7 $\frac{1}{2}$ " ASTM A36 (TYP.)
14. $\varnothing\frac{3}{8}$ "x THRU BOLT ASTM A307.
15. STEEL PLATE $\frac{1}{2}$ "x12"x14" ASTM A36 (TYP.)

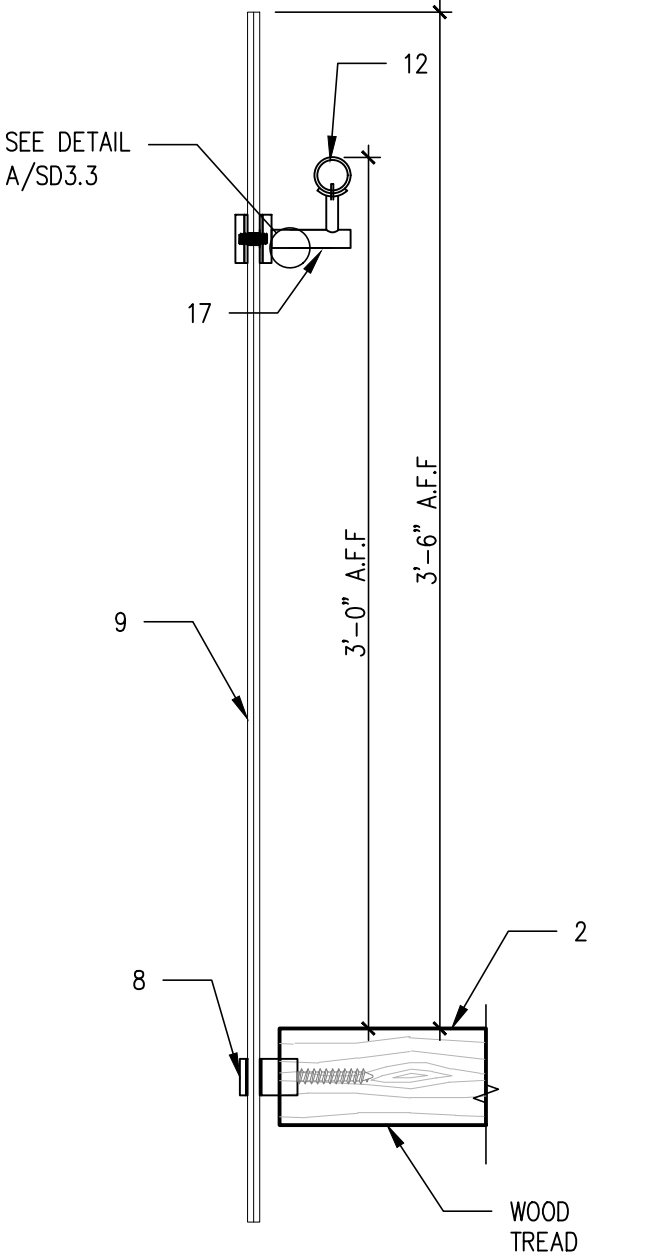

1 TREAD SECTION

SD3.2


SCALE: 1 1/2"=1'-0"

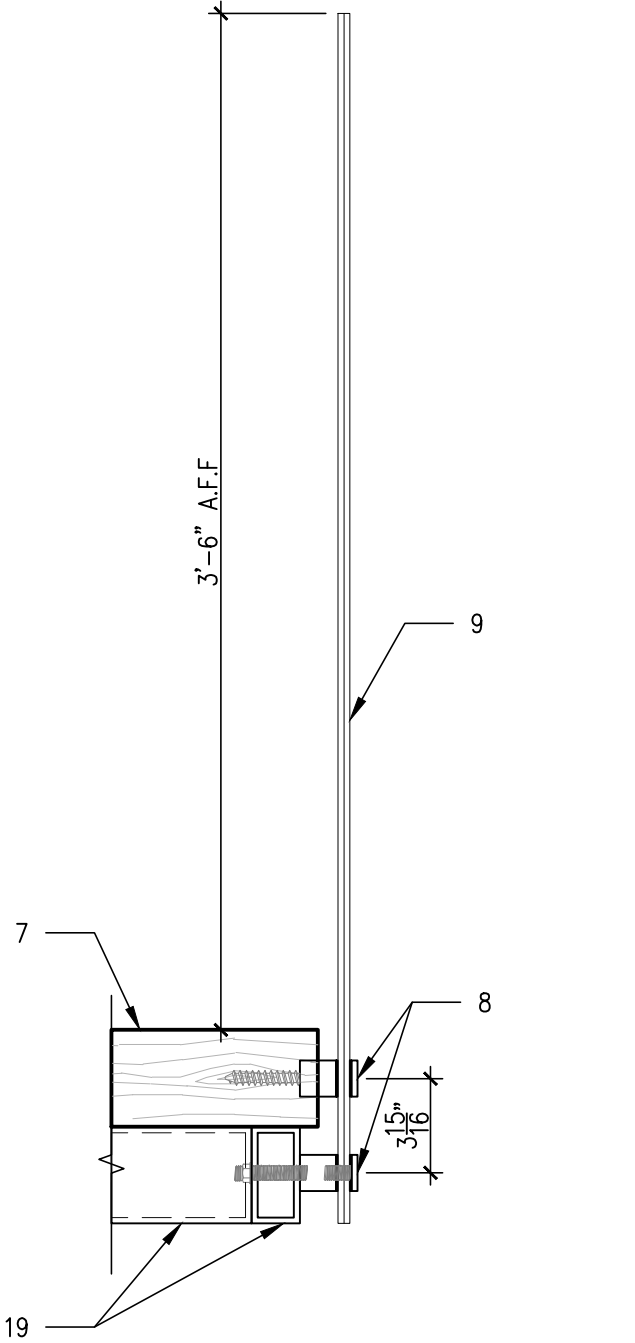

2 LANDING SECTION

SD3.2

SCALE: 1 1/2"=1'-0"

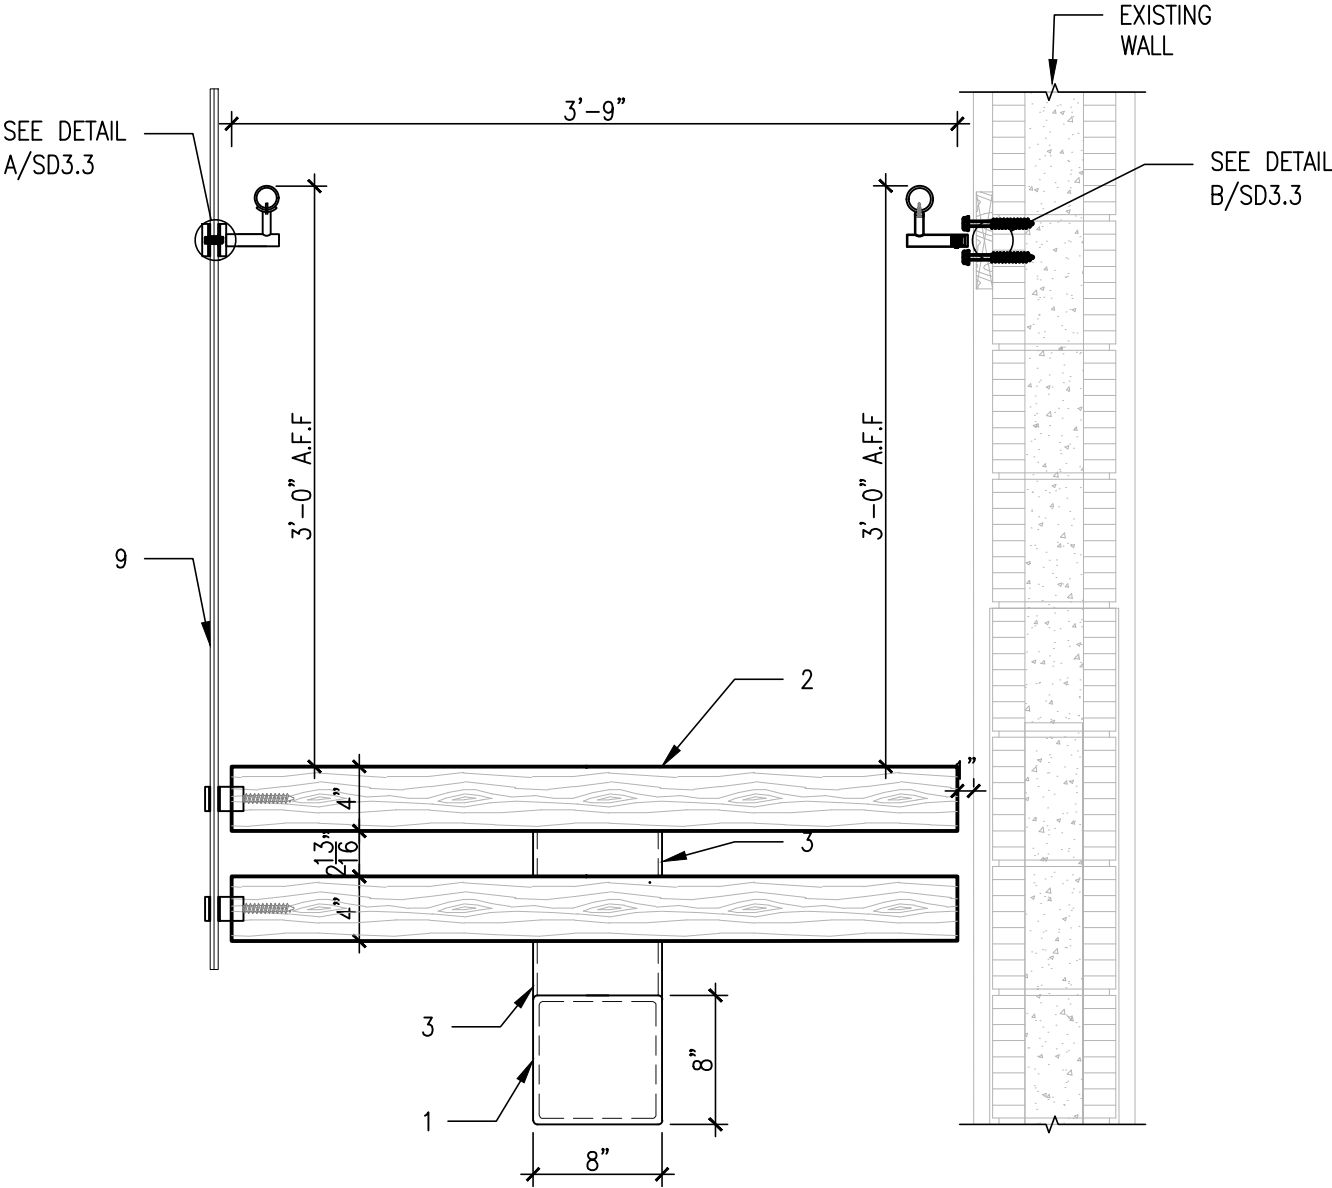

3 STAIR SECTION

SD3.2

SCALE: 1"=1'-0"

3A ENGINEERING DRAFTING

DESIGNING THE FUTURE

12651 S Dixie Hwy, Suite #322
Pinecrest, FL 33156
Phone: (305) 710-2987
email: 3aengdrafting@gmail.com

COPYRIGHT RESERVED: ALL DESIGNS AND DRAWINGS ARE EXCLUSIVE PROPERTY OF THE ENGINEER. REPRODUCTION OR USE FOR ANY PURPOSE OTHER THAN THAT AUTHORIZED IN WRITTEN BY THE ENGINEER IS PROHIBITED

ALAYM AGUILAR, PE
Lic. No-92154


Alaym Aguilar, Professional Engineer,
State of Florida, License No. 92154.
This item has been digitally signed
and sealed by Alaym Aguilar, PE, on
the date provided on the signature.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies.

PROJECT NAME:	704 SE 7 ST.
TYPE OF PROJECT:	Misc. Shop Drawings
SHEET NAME:	Stair Sections
PROJECT LOCATION:	704 SE 7 St. Fort Lauderdale, FL 33316
CLIENT NAME:	Heylin Gonzalez


REVISIONS	DATE	

MISC. SHOP DRAWING
DRAWN: Y.L.
CHECKED: A.A.
SCALE: AS SHOWN
JOB NO: 23-207
DATE: 8/18/2023

SHEET No.:
SD3.2

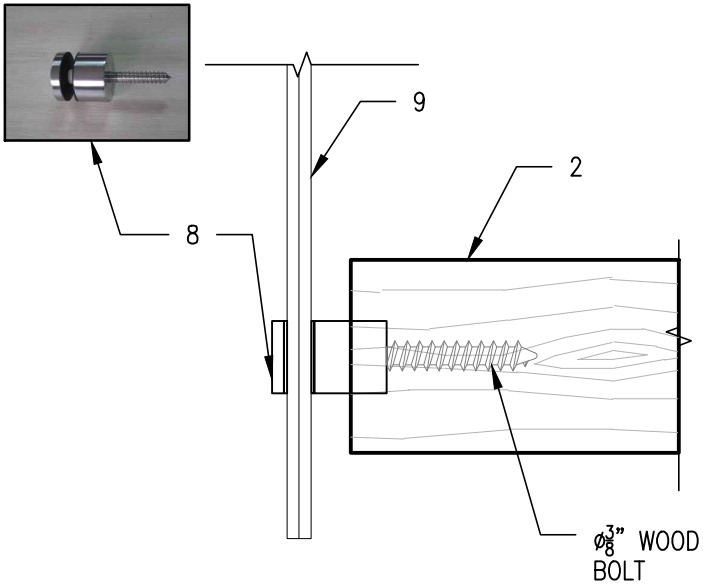

C STANDOFF WOOD
CONN. DETAIL
SD3.3 SCALE: 3"=1'-0"

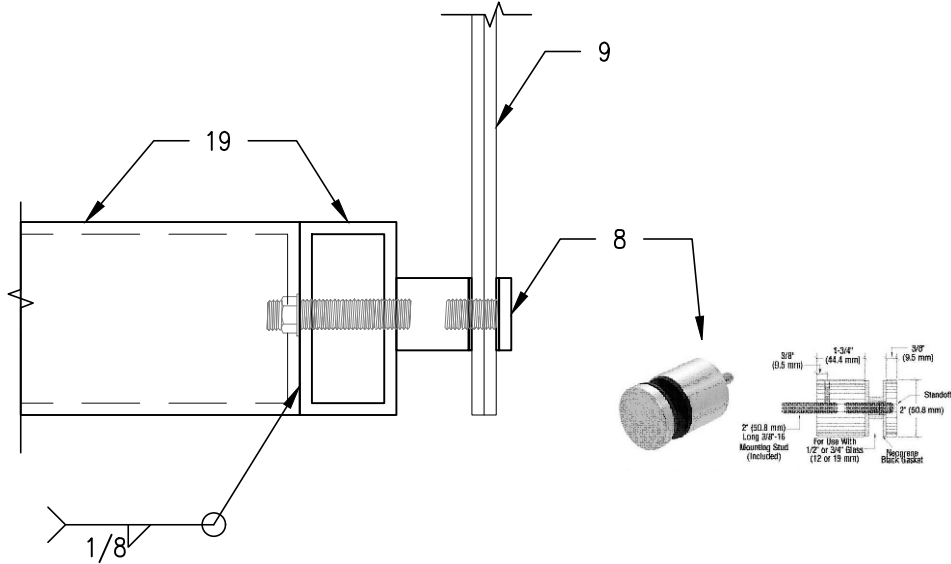


D STANDOFF STEEL
CONN. DETAIL
SD3.3 SCALE: 3"=1'-0"

STAIR LEGEND:


1. STRINGER HSS8x8x $\frac{3}{8}$ ASTM A500 Gr.B
2. 11"x4"x45" WOOD TREAD BY OTHER.
3. STEEL TREADS SUPPORT HSS8x8x $\frac{1}{4}$ ASTM A500 GR. B (TYP)
4. STEEL PLATE $\frac{1}{2}$ "x25"x12" ASTM A36 (TYP.)
5. STEEL PLATE $\frac{1}{2}$ "x16"x16" ASTM A36 (TYP.)
6. $\phi\frac{3}{8}$ "x6 $\frac{1}{2}$ " KWIK HUS-EZ (KH-EZ) W/5" MIN EMBEDMENT &4" MIN EDGE DIST (TYP)
7. LANDING 36"x4"x95" WOOD TREAD BY OTHER.
8. SS30400 ϕ 2" STANDOFF BY CR-LAURENCE (typ.)
9. 9/16" LAMINATED TEMPERED GLASS PANEL. SEE GLASS NOTES FOR SPECS (typ)
10. STEEL PLATE $\frac{1}{2}$ "x9"x1 $\frac{1}{2}$ " WELDED TO TREAD (TYP)
11. STEEL PLATE $\frac{1}{2}$ "x6"x21" ASTM A36 (TYP.)
12. SS304 CONTINUOUS HANDRAIL 1 $\frac{1}{2}$ "x $\frac{1}{8}$ " (TYP.)
13. STEEL PLATE $\frac{1}{4}$ "x7 $\frac{1}{2}$ "x7 $\frac{1}{2}$ " ASTM A36 (TYP.)
14. $\phi\frac{3}{8}$ "x THRU BOLT ASTM A307.
15. STEEL PLATE $\frac{1}{2}$ "x12"x14" ASTM A36 (TYP.)
16. $\phi\frac{3}{8}$ "x3 TAPCON ANCHOR BOLT. FILL C.M.U CELL W/ 3000 PSI GROUT AS PER MIN. SPECS.
17. SS31600 BRACKET MALIBU SERIES @42" O.C MAX.
18. $\phi\frac{3}{8}$ "x4" HILTI KH-EX SCREW ANCHOR W/3 $\frac{1}{4}$ " EMBEDMENT, 3" MIN. EDGE DIST & 4" SPACING O.C (typ)
19. STEEL TUBE HSS2x4x $\frac{1}{4}$ A500 Gr.B

NOTES:


1. FIELD VERIFY ALL DIMENSIONS PRIOR TO FABRICATION.
2. ALL CONNECTION $\frac{1}{4}$ " FILLET WELD U.N.O ON DETAILS.
3. FINISH COLOR BY OWNER/CONTRACTOR.

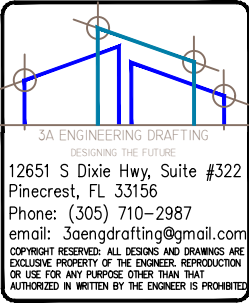

ALAYM AGUILAR, PE
Lic. No-92154
Alaym Aguilar, Professional Engineer,
State of Florida, License No. 92154.
This item has been digitally signed
and sealed by Alaym Aguilar, PE, on
the date provided on the signature.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies.

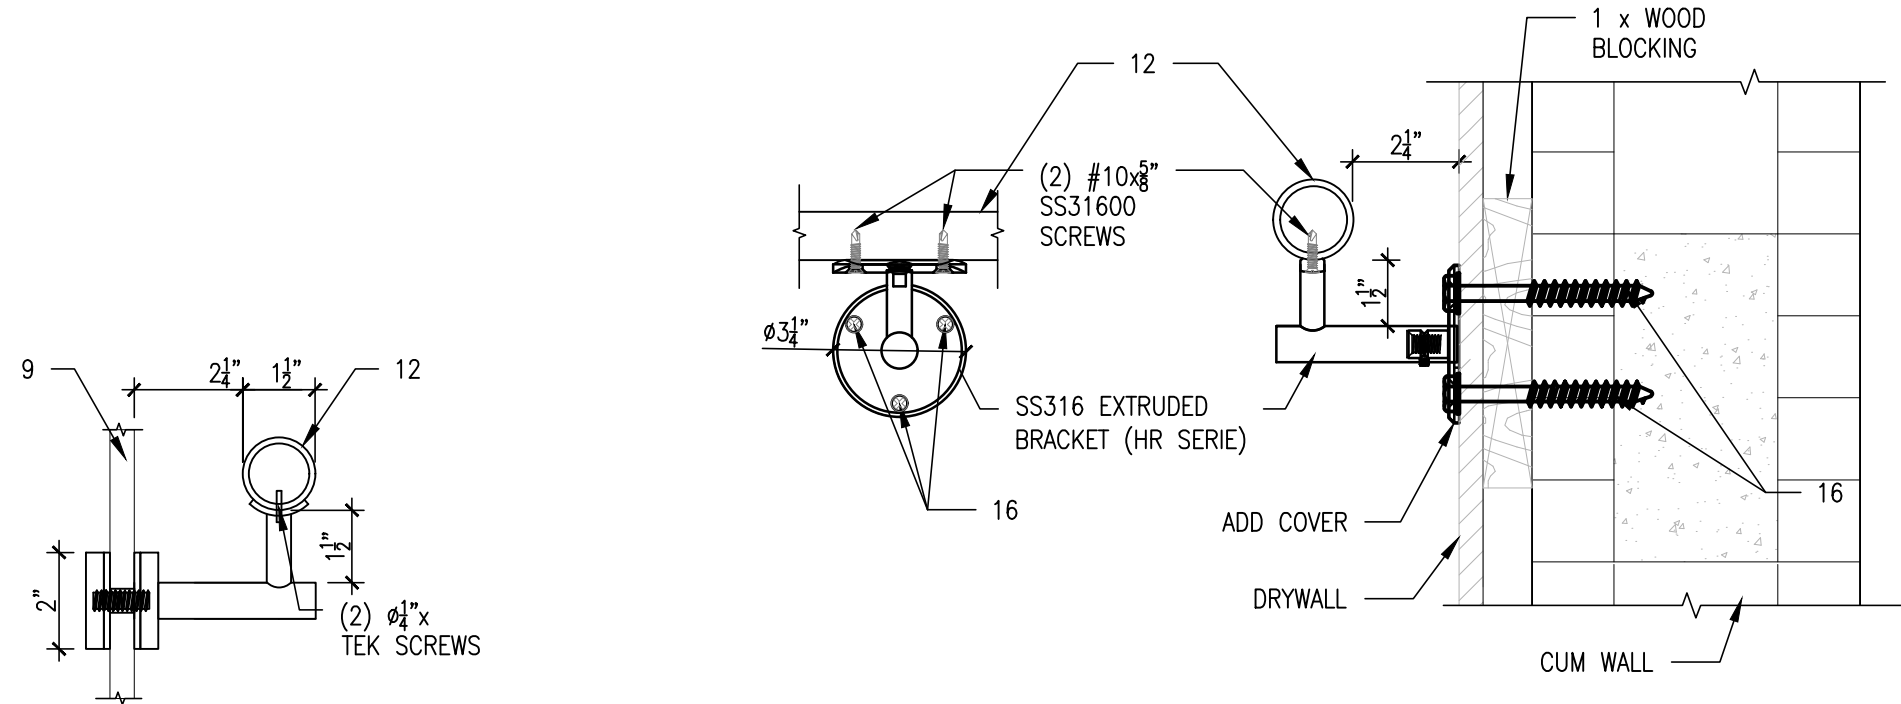

A BRACKET DETAIL
SD3.3 SCALE: 3"=1'-0"

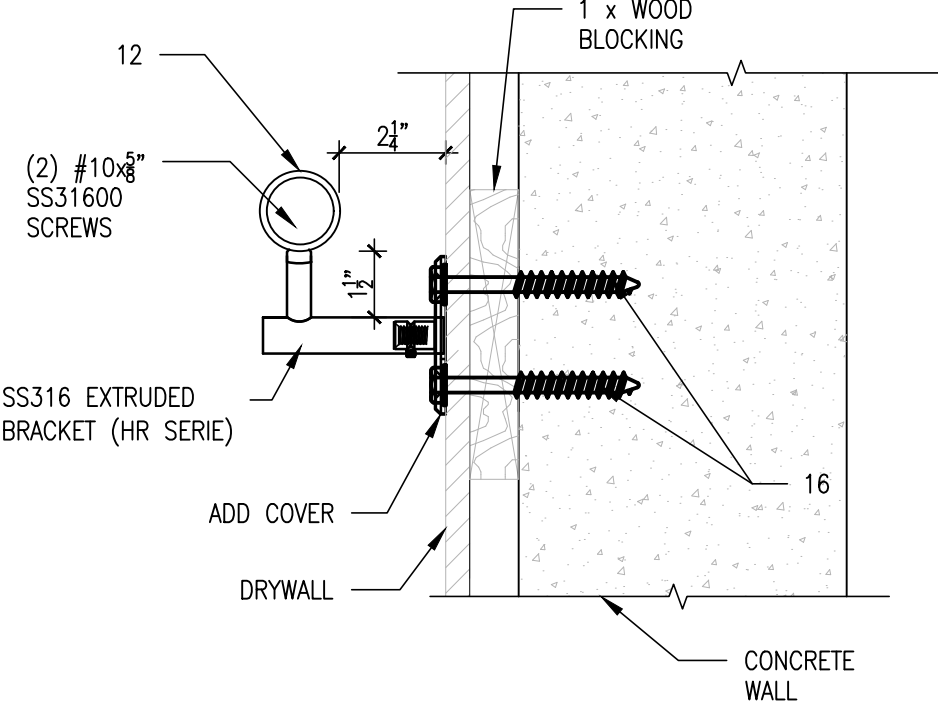




C CONN DETAIL
SD3.3 SCALE: 3"=1'-0"

PROJECT NAME: 704 SE 7 ST.
TYPE OF PROJECT: Misc. Shop Drawings
SHEET NAME: Conn. Details
PROJECT LOCATION: 704 SE 7 St, Fort Lauderdale, FL 33316
CLIENT NAME: Heylin Gonzalez

REVISIONS	DATE	

MISC. SHOP DRAWING
DRAWN: Y.L.
CHECKED: A.A.
SCALE: AS SHOWN
JOB NO: 23-207
DATE: 8/18/2023

SHEET No.:
SD3.3

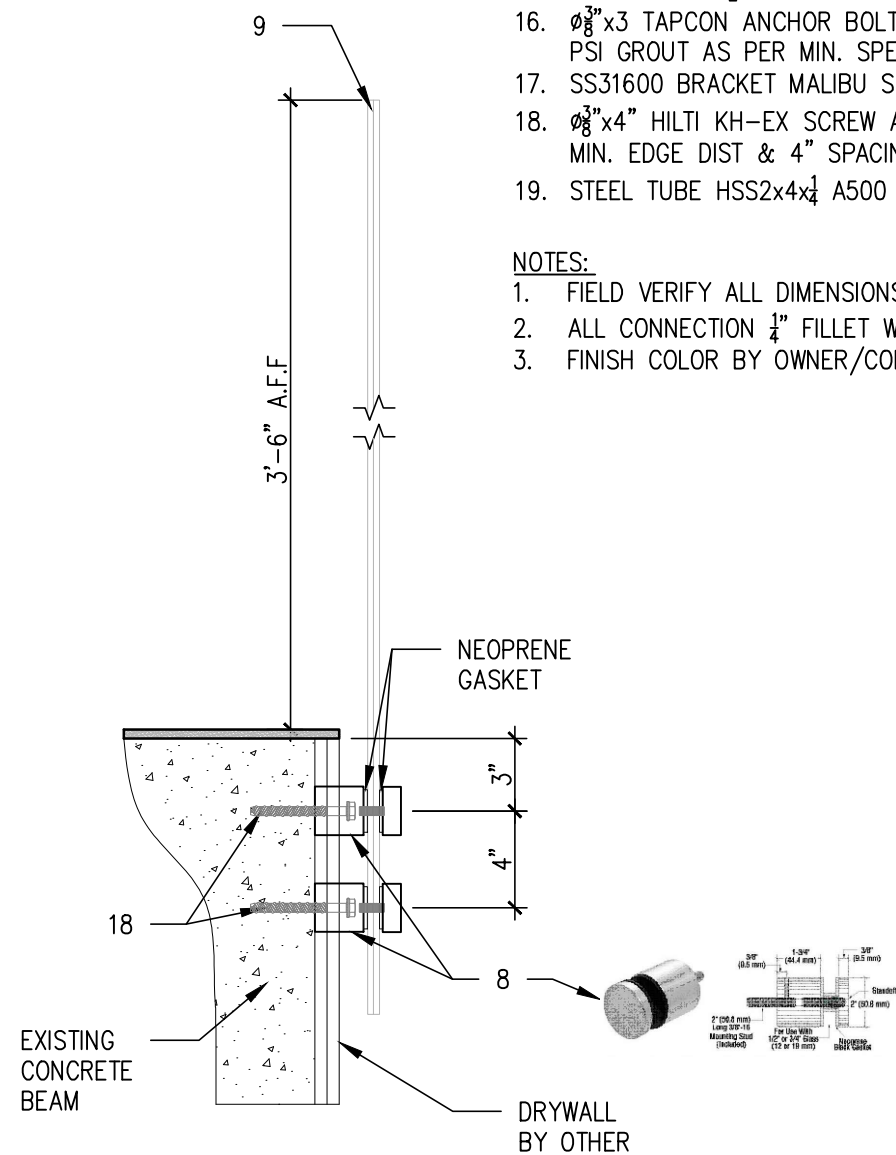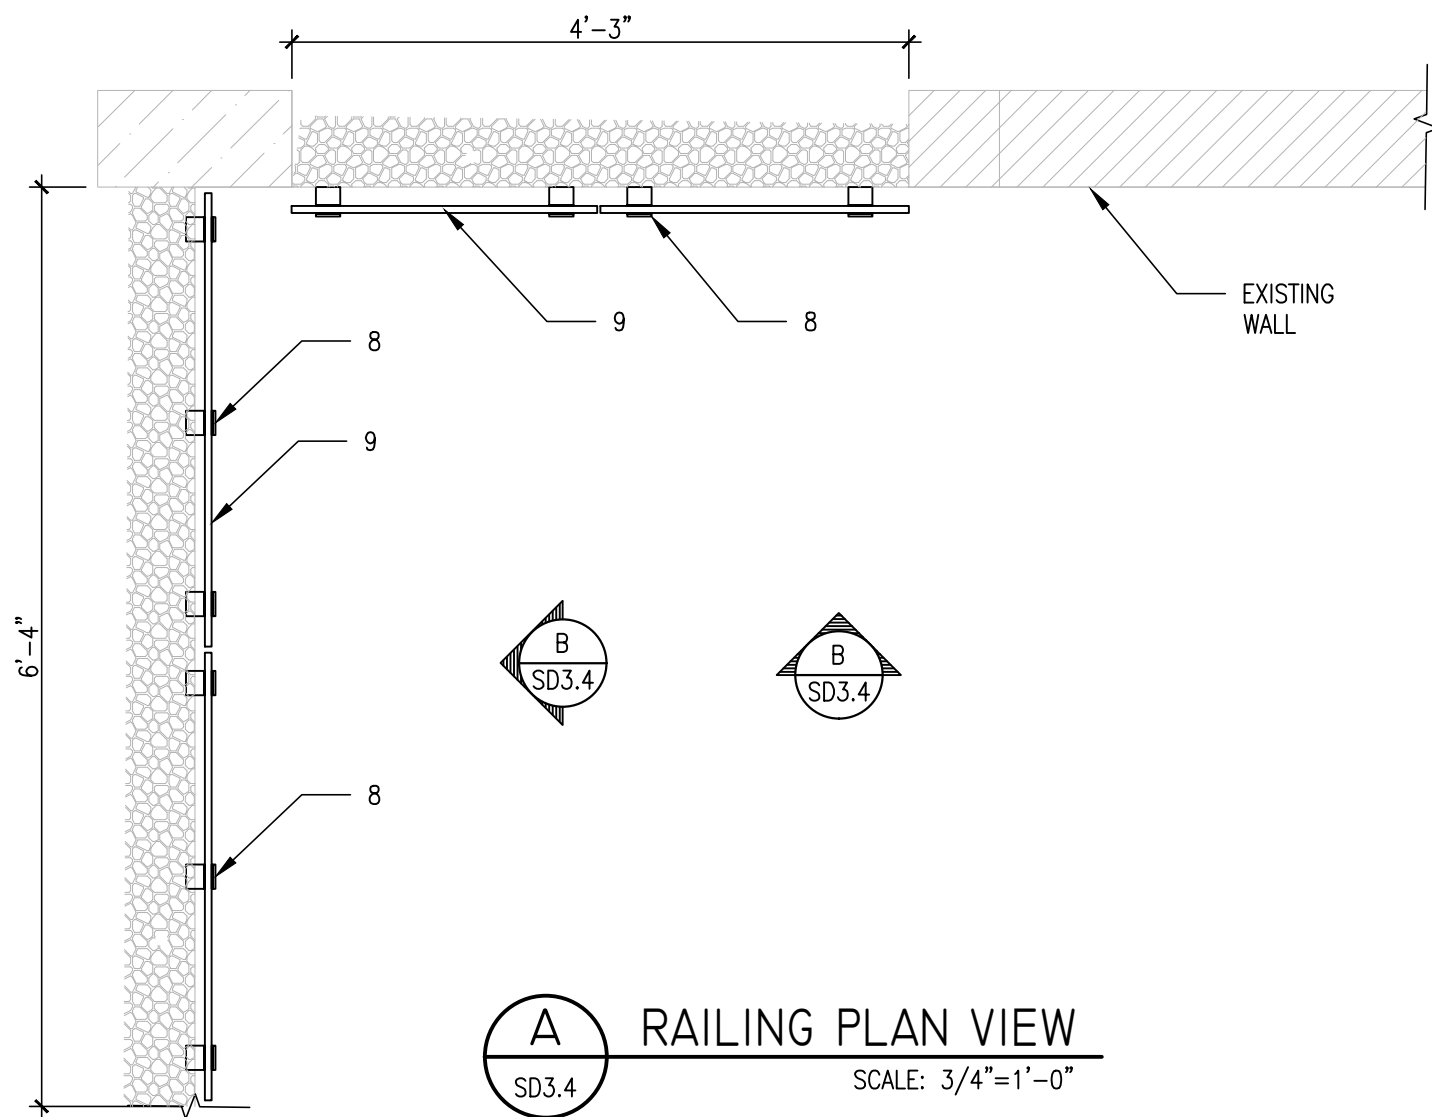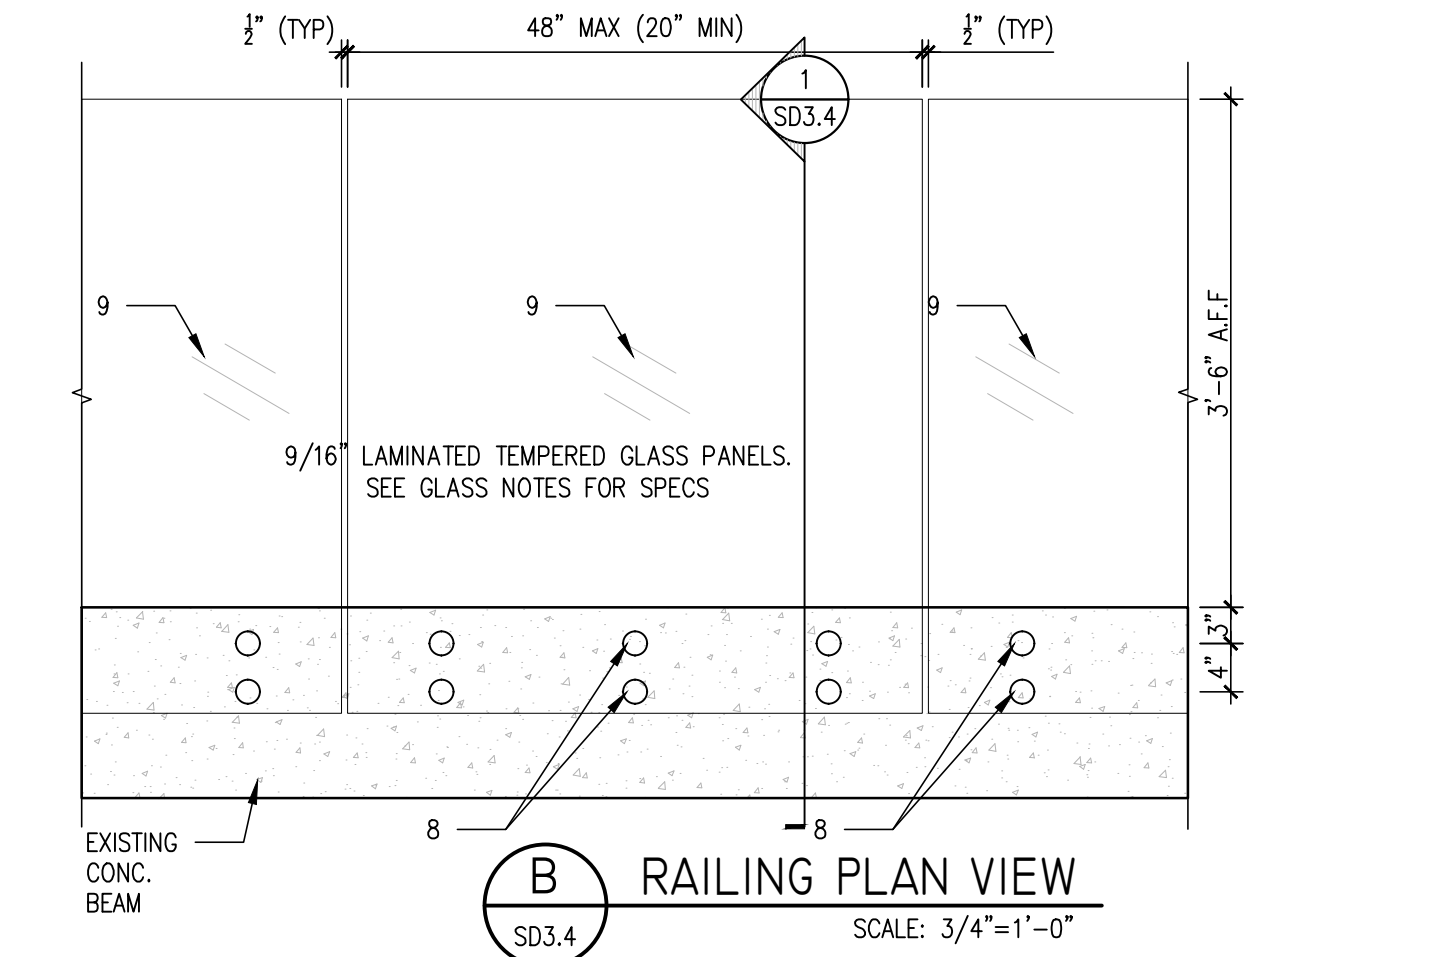


STAIR LEGEND:

1. STRINGER HSS8x8x $\frac{3}{8}$ ASTM A500 Gr.B
2. 11"x4"x45" WOOD TREAD BY OTHER.
3. STEEL TREADS SUPPORT HSS8x8x $\frac{1}{4}$ ASTM A500 GR. B (TYP)
4. STEEL PLATE $\frac{1}{2}$ "x25"x12" ASTM A36 (TYP.)
5. STEEL PLATE $\frac{1}{2}$ "x16"x16" ASTM A36 (TYP.)
6. $\emptyset\frac{5}{8}$ "x6 $\frac{1}{2}$ " KWIK HUS-EZ (KH-EZ) W/5" MIN EMBEDMENT & 4" MIN EDGE DIST (TYP)
7. LANDING 36"x4"x95" WOOD TREAD BY OTHER.
8. SS30400 $\emptyset$ 2" STANDOFF BY CR-LAURENCE (typ.)
9. 9/16" LAMINATED TEMPERED GLASS PANEL. SEE GLASS NOTES FOR SPECS (typ)
10. STEEL PLATE $\frac{1}{2}$ "x9"x1 $\frac{1}{2}$ " WELDED TO TREAD (TYP)
11. STEEL PLATE $\frac{1}{2}$ "x6"x21" ASTM A36 (TYP.)
12. SS304 CONTINUOUS HANDRAIL 1 $\frac{1}{2}$ "x $\frac{1}{8}$ " (TYP.)
13. STEEL PLATE $\frac{1}{4}$ "x7 $\frac{1}{2}$ "x7 $\frac{1}{2}$ " ASTM A36 (TYP.)
14. $\emptyset\frac{3}{8}$ "x THRU BOLT ASTM A307.
15. STEEL PLATE $\frac{1}{2}$ "x12"x14" ASTM A36 (TYP.)
16. $\emptyset\frac{3}{8}$ "x3 TAPCON ANCHOR BOLT. FILL C.M.U CELL W/ 3000 PSI GROUT AS PER MIN. SPECS.
17. SS31600 BRACKET MALIBU SERIES @42" O.C MAX.
18. $\emptyset\frac{3}{8}$ "x4" HILTI KH-EX SCREW ANCHOR W/3 $\frac{1}{4}$ " EMBEDMENT, 3" MIN. EDGE DIST & 4" SPACING O.C (typ)
19. STEEL TUBE HSS2x4x $\frac{1}{4}$ A500 Gr.B

NOTES:

1. FIELD VERIFY ALL DIMENSIONS PRIOR TO FABRICATION.
2. ALL CONNECTION $\frac{1}{4}$ " FILLET WELD U.N.O ON DETAILS.
3. FINISH COLOR BY OWNER/CONTRACTOR.

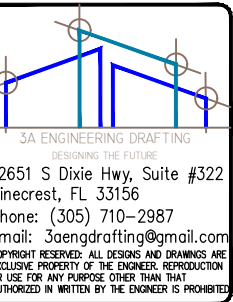

ALAYM AGUILAR, PE
Lic. No-92154
Alaym Aguilar, Professional Engineer,
State of Florida, License No. 92154.
This item has been digitally signed
and sealed by Alaym Aguilar, PE, on
the date provided on the signature.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified
on any electronic copies.

PROJECT NAME: 704 SE 7 ST.
TYPE OF PROJECT: Misc. Shop Drawings
SHEET NAME: Railing Plna View, Elevation & Section
PROJECT LOCATION: 704 SE 7 St, Fort Lauderdale, FL 33316
CLIENT NAME: Heylin Gonzalez

REVISIONS	DATE	

MISC. SHOP DRAWING
DRAWN: Y.L.
CHECKED: A.A.
SCALE: AS SHOWN
JOB NO: 23-207
DATE: 8/18/2023

SHEET No.:

SD3.4